


Mounting instructions for adjustable cones diffusers

Ø 160-315 with fixing clips

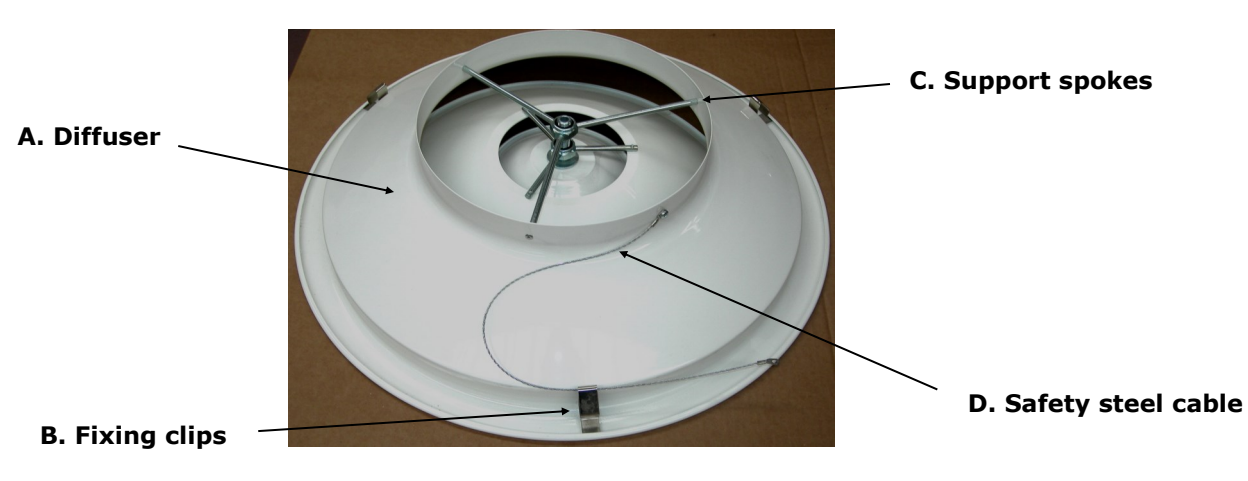

1) Put the fixing clips (B) in correspondence of the support spokes of the diffuser keeping an angle of about 120°.

2) Exert a light pressure on the clip (B) from up downwards.

3) Exert on the final part of the diffuser neck (next to the connection radius) a passing-by hole (Ø 5,5 mm) for fixing of the safety steel cable (D) .

4) Fix the head of the safety steel cable (D) through screw and nut (M5) issued with the diffuser. Fix the end of the safety steel cable to the structure of the false ceiling.

5) Insert the diffuser (A) in the special hole that that was previously prepared.

Hole dimension:

- Ø160 (Ø310); Ø200 (Ø395);
- Ø250 (Ø490); Ø315 Ø(615)

