

SDN-V GALVA

- Grilles for rectangular ducts
- Galvanized steel
- Galvanized natural finish
- Vertical blades



Single deflection grilles for rectangular duct type SDN-V GALVA

Single deflection grille for rectangular duct mounting with adjustable blades made of galvanized steel

Brand

- Cairox

Application

- For air supply and exhaust in ventilation and air conditioning systems.

Material

- Galvanized steel

Colour

- Galvanized steel
- Other colours available upon request

Composition

- Single row of vertical deflection blades

Mounting

- Visible screw mounting on rectangular duct

Accessories

- Volume control damper **DWN**

Text for tender

- The grilles for air supply or exhaust have individually adjustable blades to regulate the direction of the air flow pattern. They are made of galvanized steel natural finish with a single deflection and are supplied with a volume control damper.
- **Cairox** Type **SDN-V GALVA+DWN**

Order example

■ SDN-V GALVA, 400, 100 + DWN

Explanation


SDN-V GALVA = Grille type

400 = Length

100 = Height

Accessories (Optional)

DWN = Volume control damper

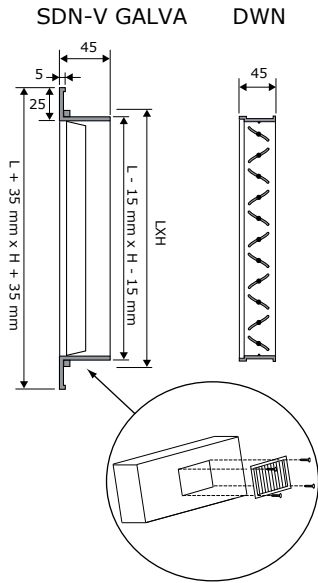

		Quick selection													
SDN-V	LxH	200x100	300x100	400x100	300x150	500x100	400x150 600x100	500x150	800x100 400x200	600x150	1000x100 500x200	800x150 600x200	1000x150 800x200	1000x200	
Q	Ak	0.0111	0.018	0.025	0.0285	0.032	0.0389	0.0494	0.0529	0.0598	0.0668	0.0807	0.1016	0.1365	
100	Vk	2.5	1.5	1.1											
	X0,25	2.8	2.2	1.8											
	Ps	2.7	1	0.5											
	Lw(A)	<20	<20	<20											
150	Vk	3.8	2.3	1.7	1.5	1.3	1.1								
	X0,25	4.2	3.3	2.8	2.6	2.5	2.2								
	Ps	6.1	2.3	1.2	0.9	0.7	0.5								
	Lw(A)	25	<20	<20	<20	<20	<20								
200	Vk	5	3.1	2.2	1.9	1.7	1.4	1.1	1.1						
	X0,25	5.6	4.4	3.7	3.5	3.3	3	2.6	2.5						
	Ps	10.9	4.1	2.2	1.7	1.3	0.9	0.6	0.5						
	Lw(A)	33	23	<20	<20	<20	<20	<20	<20						
300	Vk	7.5	4.6	3.3	2.9	2.6	2.1	1.7	1.6	1.4	1.2	1			
	X0,25	8.3	6.5	5.5	5.2	4.9	4.4	3.9	3.8	3.6	3.4	3.1			
	Ps	24.6	9.4	4.9	3.7	3	2	1.2	1.1	0.8	0.7	0.5			
	Lw(A)	44	33	26	23	21	<20	<20	<20	<20	<20	<20			
400	Vk		6.2	4.4	3.9	3.5	2.9	2.2	2.1	1.9	1.7	1.4	1.1		
	X0,25		8.7	7.4	6.9	6.5	5.9	5.3	5.1	4.8	4.5	4.1	3.7		
	Ps		16.7	8.6	6.6	5.3	3.6	2.2	1.9	1.5	1.2	0.8	0.5		
	Lw(A)		41	34	31	29	24	<20	<20	<20	<20	<20	<20		
600	Vk			6.7	5.8	5.2	4.3	3.4	3.2	2.8	2.5	2.1	1.6	1.2	
	X0,25			11.1	10.4	9.8	8.9	7.9	7.6	7.2	6.8	6.2	5.5	4.7	
	Ps			19.5	15	11.9	8	5	4.4	3.4	2.7	1.9	1.2	0.7	
	Lw(A)			45	42	39	35	30	28	26	23	<20	<20	<20	
800	Vk				7.8	6.9	5.7	4.5	4.2	3.7	3.3	2.8	2.2	1.6	
	X0,25				13.9	13.1	11.9	10.5	10.2	9.6	9.1	8.2	7.3	6.3	
	Ps				26.7	21.2	14.3	8.9	7.7	6.1	4.9	3.3	2.1	1.2	
	Lw(A)				50	47	43	38	36	33	31	27	22	<20	
1000	Vk						7.1	5.6	5.3	4.6	4.2	3.4	2.7	2	
	X0,25						14.8	13.2	12.7	12	11.3	10.3	9.2	7.9	
	Ps						22.4	13.9	12.1	9.5	7.6	5.2	3.3	1.8	
	Lw(A)						49	44	42	39	37	33	28	21	
1200	Vk							6.7	6.3	5.6	5	4.1	3.3	2.4	
	X0,25							15.8	15.3	14.4	13.6	12.4	11	9.5	
	Ps							20.1	17.5	13.7	11	7.5	4.7	2.6	
	Lw(A)							48	47	44	42	38	33	26	
1600	Vk									7.4	6.7	5.5	4.4	3.3	
	X0,25									19.1	18.1	16.5	14.7	12.7	
	Ps									24.4	19.5	13.4	8.4	4.7	
	Lw(A)									52	50	45	40	34	
2000	Vk											6.9	5.5	4.1	
	X0,25											20.6	18.4	15.8	
	Ps											20.9	13.2	7.3	
	Lw(A)											51	46	40	
2400	Vk												6.6	4.9	
	X0,25												22	19	
	Ps												19	10.5	
	Lw(A)												51	45	

Symbols and specifications

- $L \times H$ = Width L and height H in mm
 - Q = Air volume in m^3/h
 - A_k = Effective surface (free area) in m^2
 - V_k = Average effective velocity through the grill in m/s
 - $X_{0.25}$ = Horizontal throw in m at an end velocity V_t of 0.25 m/s
 - P_s = Static pressure loss given in Pa
 - $L_w(A)$ = Acoustic power in $dB(A)$
- The throw $X_{0.25}$ is given without deflection of the airstream at an end velocity of 0.25 m/s . The distances are given for a smooth ceiling and installation distance of the center of the grille at 300 mm from the ceiling surface. When mounted at a distance of 400 to 600 mm from the ceiling, a horizontal deflection towards the ceiling of 15° is advised. When mounted at a distance larger than 600 mm from the ceiling, the throw distance $X_{0.25}$ will be smaller than mentioned due to the missing coanda effect. In these cases and for all other special requirements, please contact our engineering office.
 - The values are given for isothermal supply air. Throw distances for cooling conditions at $-11K$ can be calculated by dividing the $X_{0.25}$ values with factor 1.1. For heating purposes at Dt of $+11K$ a multiplier of 1.1 should be applied to the given $X_{0.25}$ value.
 - Advised mounting distance between centers of multiple grilles in the same wall should be greater than $1/3$ of the throw length $X_{0.25}$ (without spread)
 - The pressure losses P_s are given for grilles without damper or with fully opened damper.
 - The acoustic powers $L_w(A)$ are given for grilles without damper or with fully opened damper without room attenuation. Acoustic powers below 20 $dB(A)$ are mentioned as " <20 " in the tables.

Placement instruction

