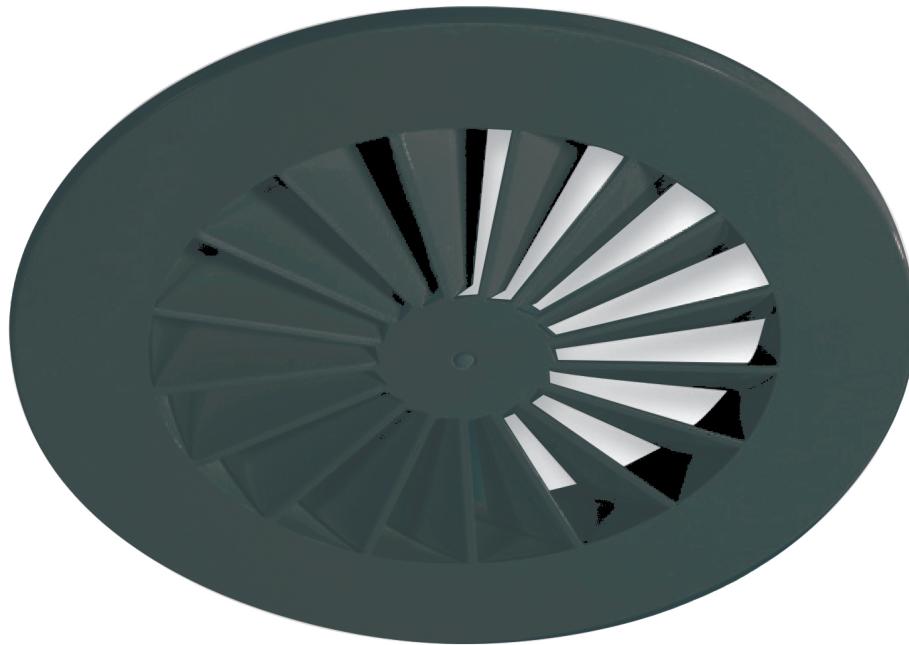


**RWR-N
(RAL9005)**

- Swirl diffusers
- Circular
- Steel
- Black, RAL 9005



Black circular swirl diffusers with fixed blades type RWR-N (RAL9005)

Circular swirl ceiling diffusers with fixed blades

Brand

- Cairox

Application

- For air supply and exhaust in ventilation and air conditioning systems.

Material

- Steel

Colour

- Colour black, RAL 9005
- Other colours available upon request

Composition

- Fixed blades

Mounting

- Fixing with central screw into the crossbar of the plenum box

Accessories

- Plenum box, type **RER-LB**
- Insulated plenum box, type **RER-LB ISO**
- Regulating valve for plenum box, type **CRC**
- Mounting crossbar for direct duct mounting, type **FGN**
- Mounting crossbar for direct ceiling mounting, type **FHN**

Text for tender

- The air supply diffusers are of the swirl type with fixed blades. They are made of steel with black powder coating RAL 9005 and supplied with a volume control damper in the plenum box.
- Cairox type **RWR-N RAL9005+RER-L**

Order example

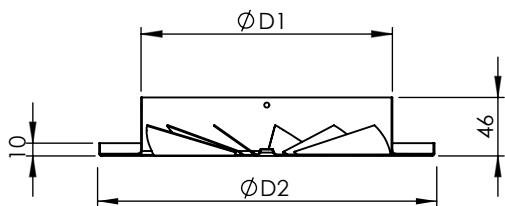
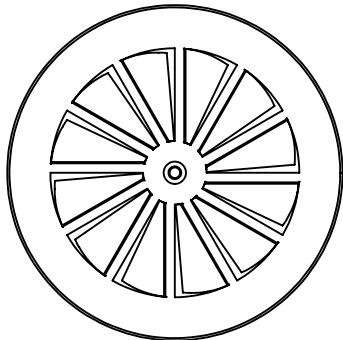
- **RWR-N RAL9005, 315 + RER-LB + CRC 250**

Explanation

RWR-N RAL9005 = Diffuser type

315 = Diffuser size (\varnothing diffuser neck connection)

Accessories

RER-LB = Plenum box**CRC** = Regulating valve for plenum box**250** = Plenum box connection diameter

Dimensions				
RWR-N	ØD1 [mm]	ØD2 [mm]	#Blades	
125	123	171	8	
160	158	214	10	
200	198	264	12	
250	248	326	14	
315	313	404	16	
355	353	448	18	
400	398	500	18	
500	498	596	20	

		Quick selection																					
RWR-N		125			160			200			250			315			355			400			
Q	Ak	0.0099			0.0123			0.0176			0.0226			0.033			0.0359			0.05			
	B	1.2	2.4	3.6	1.2	2.4	3.6	1.2	2.4	3.6	1.2	2.4	3.6	1.2	2.4	3.6	1.2	2.4	3.6	1.2	2.4	3.6	
50	Vz	H= 2.7 H= 3.2 H= 3.8	0.08 0.06 0.04	0.05 0.04 0.03																			
	Vk		1.4																				
	X0.25		0.5																				
	Ps		11																				
	Lw(A)		<20																				
	Vz	H= 2.7 H= 3.2 H= 3.8	0.15 0.11 0.09	0.11 0.09 0.07	0.08 0.06 0.05	0.14 0.13 0.12	0.1 0.08 0.06	0.08 0.07 0.05	0.11 0.09 0.07	0.08 0.07 0.05	0.06 0.05 0.05												
100	Vk		2.8			2.3			1.6														
	X0.25		0.9			0.8			0.7														
	Ps		45			19			6														
	Lw(A)		35			26			<20														
	Vz	H= 2.7 H= 3.2 H= 3.8	0.23 0.17 0.13	0.16 0.13 0.11	0.13 0.12 0.1	0.21 0.19 0.18	0.15 0.14 0.13	0.11 0.10 0.09	0.11 0.10 0.09	0.1 0.09 0.08	0.15 0.14 0.13	0.11 0.10 0.09	0.08 0.07 0.06	0.08 0.07 0.06									
	Vk		4.2			3.4			2.4			1.8											
150	X0.25		1.4			1.2			1			0.9											
	Ps		100			41			14			5											
	Lw(A)		46			38			24			<20											
	Vz	H= 2.7 H= 3.2 H= 3.8	0.31 0.23 0.18	0.22 0.18 0.14	0.17 0.21 0.16	0.17 0.16 0.13	0.15 0.16 0.13	0.11 0.11 0.10	0.15 0.14 0.13	0.1 0.12 0.11	0.11 0.10 0.09	0.15 0.14 0.13	0.11 0.10 0.09	0.1 0.08 0.07	0.1 0.08 0.07								
	Vk		5.6			4.5			3.2			2.5			1.7			1.5					
	X0.25		1.8			1.6			1.4			1.2			1			1.1					
200	Ps		178			72			25			9			3			2					
	Lw(A)		54			46			32			22			<20			<20					
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
300	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
	Lw(A)																						
400	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
500	Vk																						
	X0.25																						
	Ps																						
	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
600	X0.25																						
	Ps																						
	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
800	Ps																						
	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
1000	Lw(A)																						
	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
	Lw(A)																						
1200	Vz	H= 2.7 H= 3.2 H= 3.8																					
	Vk																						
	X0.25																						
	Ps																						
	Lw(A)																						

Symbols and specifications

- Q = Air volume in m³/h
- Ak = Effective surface (free area) in m²
- B = Distance between the diffusers in m
- H = Installation height of the diffusers in m
- Vz = Maximum velocity at the occupied zone according to distance between the diffusers and installation height in m/s
- Vk = Average effective velocity through the diffuser in m/s
- X0.25 = Throw length in m at an end velocity Vt of 0,25m/s
- Ps = Static pressure loss given in Pa
- Lw(A) = Acoustic power in dB(A)
- The throw X0.25 is given at an end velocity of 0.25m/s for a smooth ceiling without any obstacles.
- The values are given for isothermal supply air. Throw distances for cooling conditions at -11K can be calculated by dividing the X0.25 values with factor 1.1. For heating purposes at Dt of +11K a multiplier of 1.1 should be applied to the

given $X_{0.25}$ value.

- In order to achieve a high comfort level, selections can be made according to the maximal velocity at the occupied zone V_z . These values are given at distances between diffusers B and installation heights H . Velocities V_z lower than, or equal to 0,25m/s at the occupied zone are advised.
- The pressure losses P_s are given for diffusers without damper or with fully opened damper.
- The acoustic power values $L_w(A)$ are given for diffusers without damper or with fully opened damper without room attenuation. Acoustic powers below 20dB(A) are mentioned as "<20" in the tables.
- For all special requirements, please contact our engineering office.

Placement instruction

