


**RWR-4 TS
(RAL9016)**

- Swirl diffusers
- Circular
- Steel
- White, RAL 9016

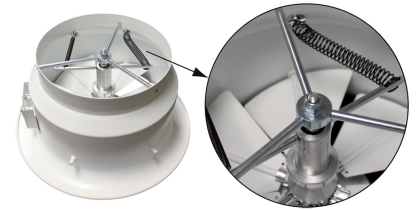

Variable thermostatic swirl diffusers type RWR-4 TS (RAL9016)

Circular thermostatically adjustable swirl ceiling diffuser for high ceiling
Set blade angle switches automatically between cooling and heating mode.

Brand

- Cairox

Application

- For air supply in ventilation and air conditioning systems.

Material

- Steel and aluminium

Colour

- Standard colour white, RAL 9016
- Other colours available upon request

Composition

- Adjustable blades with thermostatical regulator (bimetal)
- Perforated plate in the collar of the diffuser
- α = Blade angle

Text for tender

- The air supply diffusers are of the swirl type with adjustable blades with a thermostatical regulator (bimetal). They are made of steel and aluminium with white powder coating finish RAL 9016.
- **Cairox type RWR-4 TS**

Order example


- **RWR-4 TS, 400**

Explanation

RWR-4 = Diffuser type

TS = Thermostatic control element (bi-metal)

400 = Neck size of diffuser

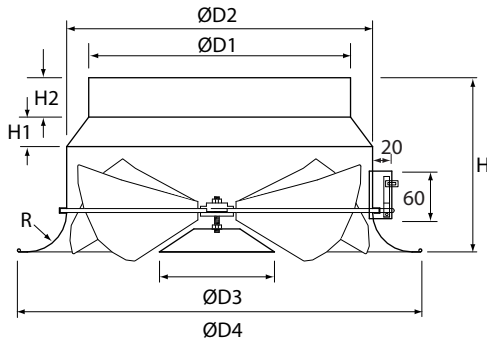


Dimensions								
	D1 [mm]	D2 [mm]	D3 [mm]	D4 [mm]	H [mm]	H1 [mm]	H2 [mm]	R [mm]
RWR-4 200	198	248	96	350	180	20	40	30
RWR-4 250	248	298	133	400	205	30	40	30
RWR-4 315	313	398	175	500	230	30	40	30
RWR-4 400	398	465	175	615	270	45	60	60
RWR-4 500	498	565	225	780	320	35	60	80
RWR-4 630	628	665	273	935	390	25	80	100

Quick selection							
RWR-4 (TS)		200	250	315	400	500	630
Q	Ak	0.0305	0.0479	0.0765	0.1238	0.194	0.3088
	Hm	2,5 - 3,8	3,0 - 5,3	3,3 - 6	4,3 - 7,5	5,5 - 16	7,5 - 26
300	B(min)	2.4	1.6				
	Vk	2.7	1.7				
	Ps	7	3				
	Lw(A)	33	22				
400	B(min)	3	2.2				
	Vk	3.6	2.3				
	Ps	12	5				
	Lw(A)	42	30				
500	B(min)	3.8	2.8	2			
	Vk	4.6	2.9	1.8			
	Ps	19	7	3			
	Lw(A)	49	37	22			
600	B(min)		3.4	2.4	2.8		
	Vk		3.5	2.2	1.3		
	Ps		11	4	2		
	Lw(A)		42	27	20		
800	B(min)			3	2.8		
	Vk			2.9	1.8		
	Ps			8	3		
	Lw(A)			36	23		
1000	B(min)			3.8	2.8	3.4	
	Vk			3.6	2.2	1.4	
	Ps			12	5	2	
	Lw(A)			43	30	20	
2000	B(min)				5.4	4	4.2
	Vk				4.5	2.9	1.8
	Ps				19	7	3
	Lw(A)				51	38	22
3000	B(min)					6	4.4
	Vk					4.3	2.7
	Ps					17	7
	Lw(A)					50	33
4000	B(min)						5.8
	Vk						3.6
	Ps						12
	Lw(A)						42
5000	B(min)						7.2
	Vk						4.5
	Ps						19
	Lw(A)						49


Symbols and specifications

- Q = Air Volume in m³/h
- Ak = Effective surface (free area) of the neck of the diffuser in m²
- Hm = Advised minimum - maximum mounting height in m
- Bmin = Advised minimum distance between diffusers in m
- Vk = Air velocity trough the neck of the diffuser in m/s
- Ps = Static pressure loss in Pa
- Lw(A) = Acoustic power in dB(A)
- The values are given for isothermal supply air without Coanda effect.
- The values in the table are given at an inclination angle α of the vanes of the diffuser set at 45°.
- In order to achieve a high comfort level, the angle of the blades are automatically altered according to air supply temperature. The minimum and maximum angle of the blades can mechanically be limited. The ideal set angles can be determined in function of the temperature difference Δt between the supply air and room air temperature. (see selection graphs)
- Acoustic powers below 20dB(A) are mentioned as "<20" in the tables.
- For all special requirements, please contact our engineering office.


Placement instruction

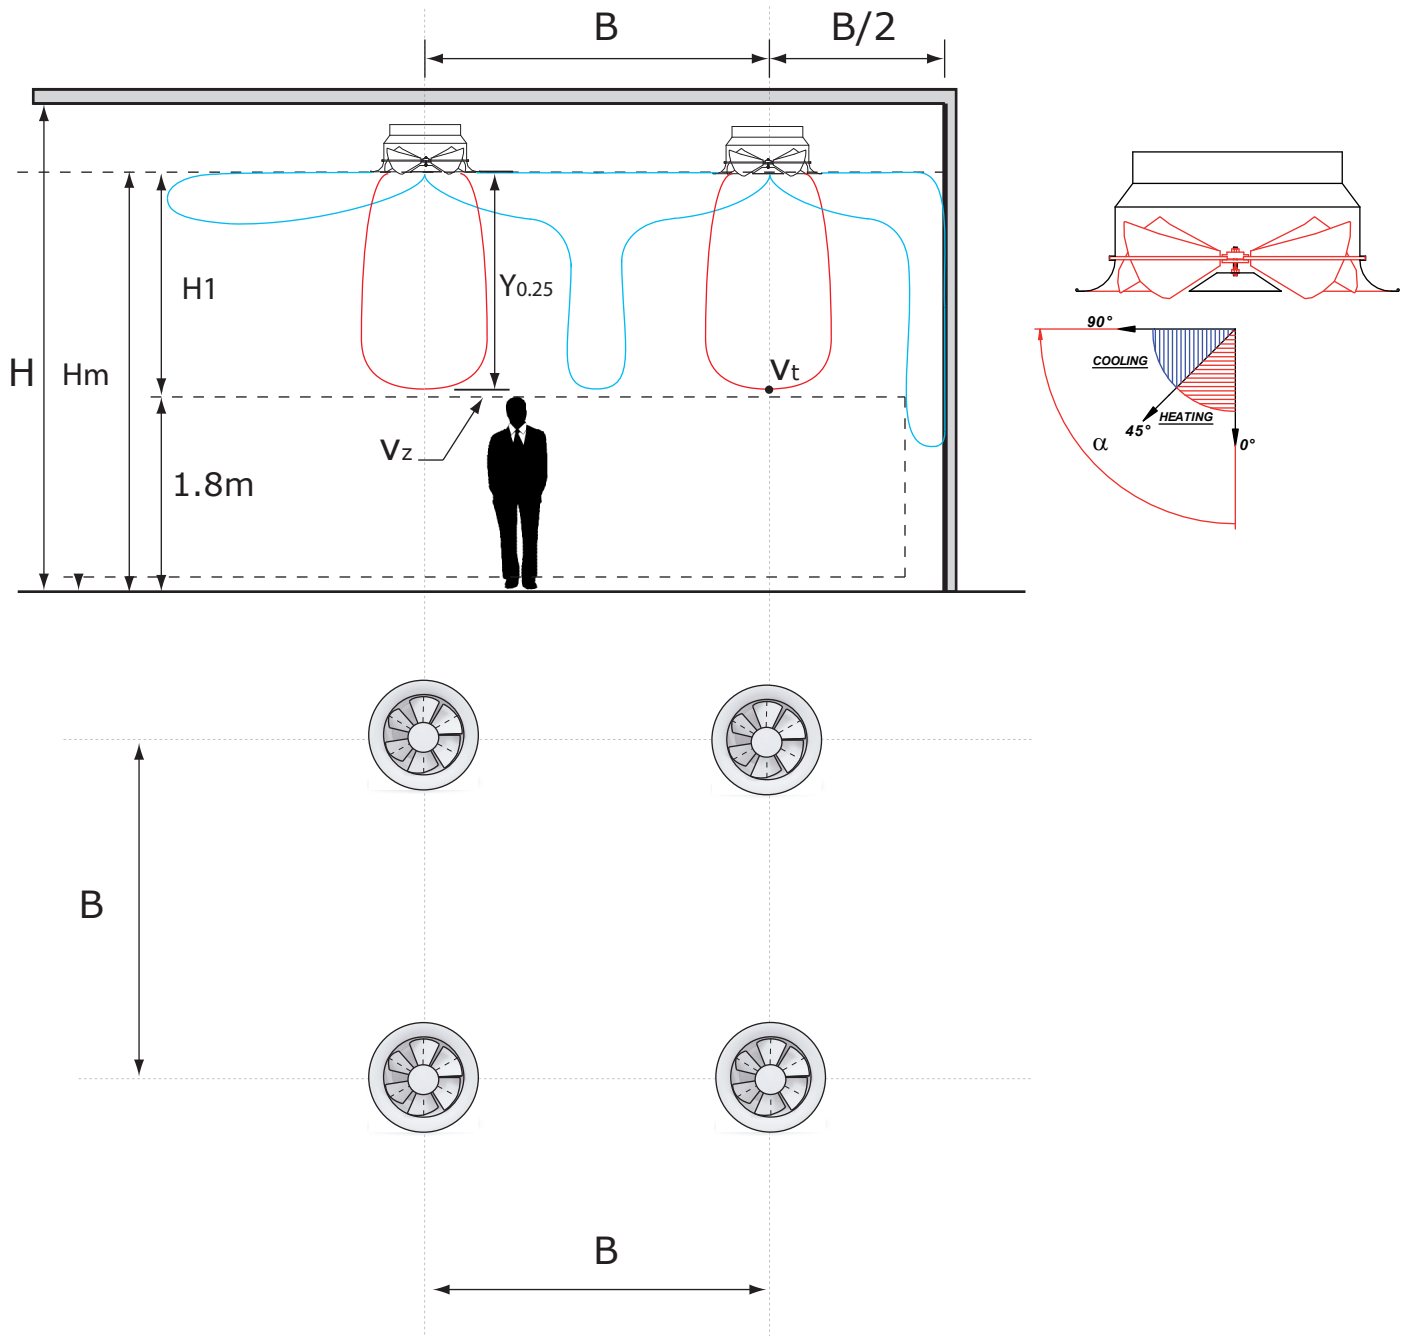


Noise selection table

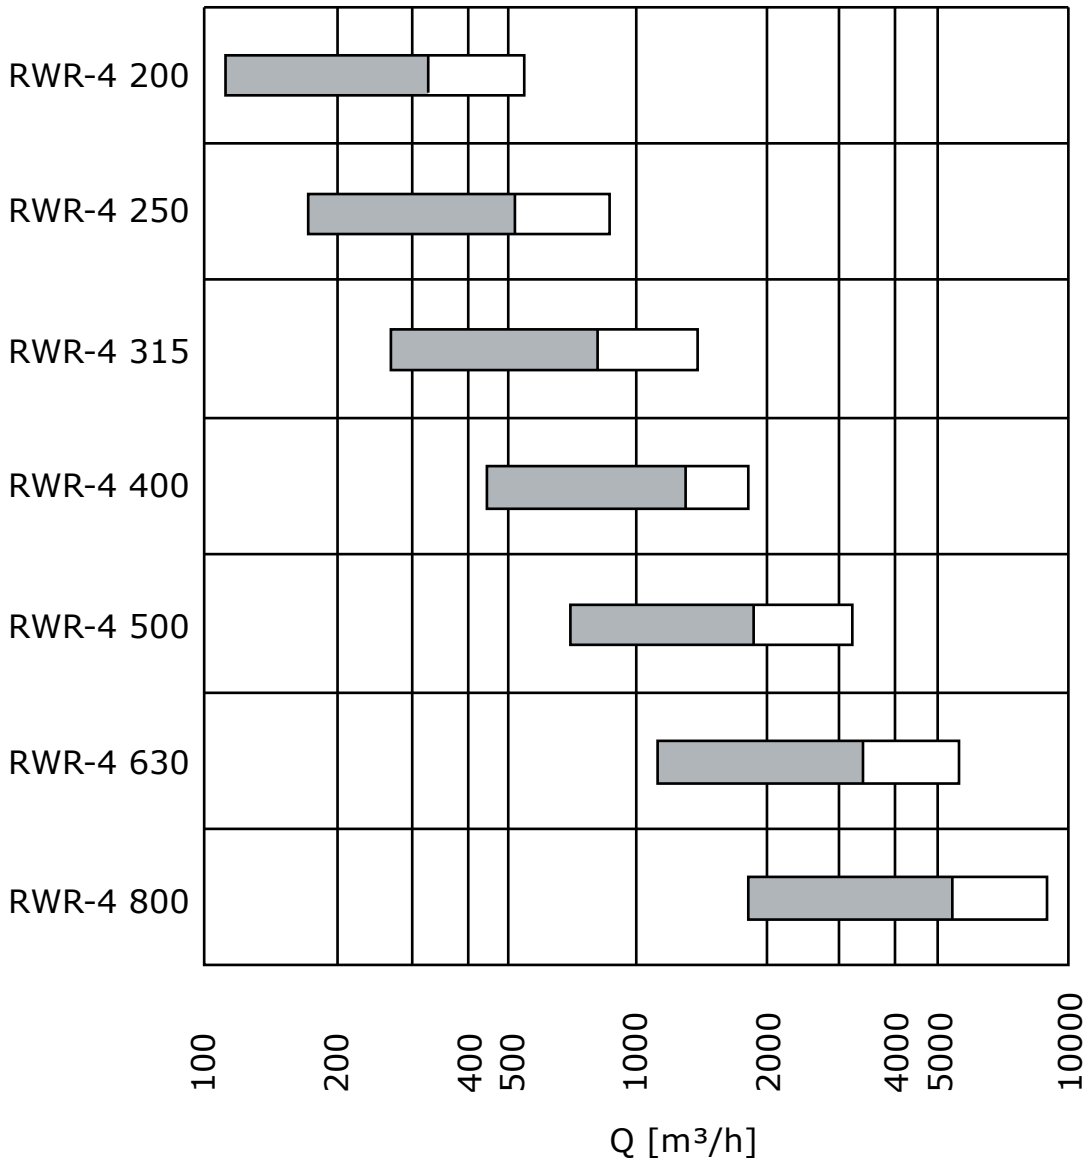 $\alpha = 45^\circ$ ■ $35 < (L_{wA} [dB(A)] < 20$ □ $50 < (L_{wA} [dB(A)] < 35$ 

Placement height selector

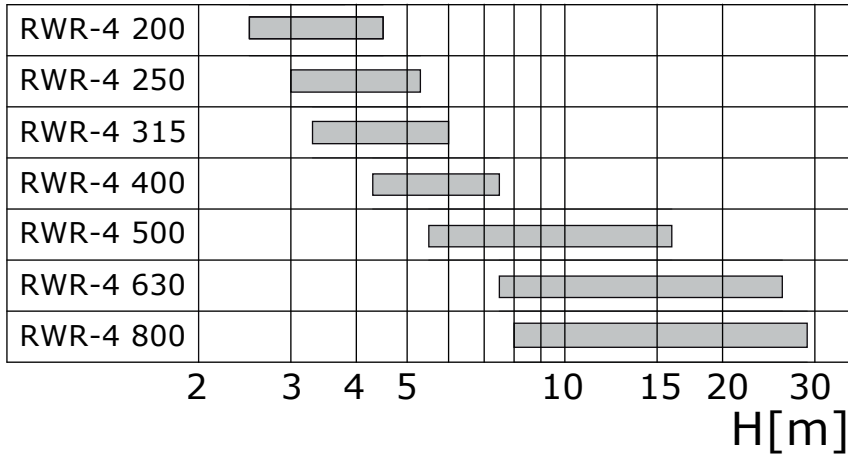




Minimum distance selection

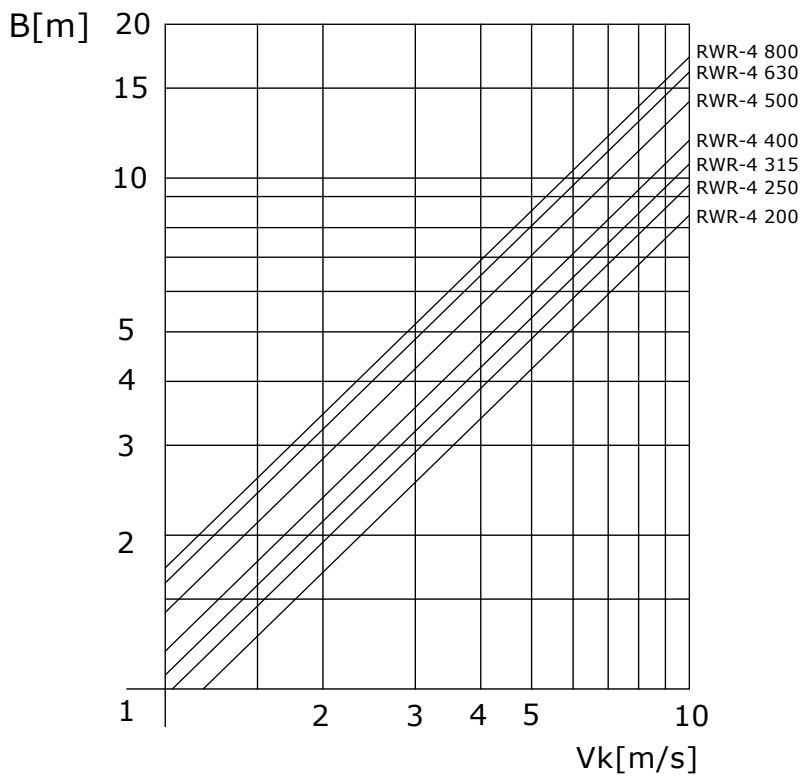



Angle setting size 200

α -setting RWR-4 200

COOLING

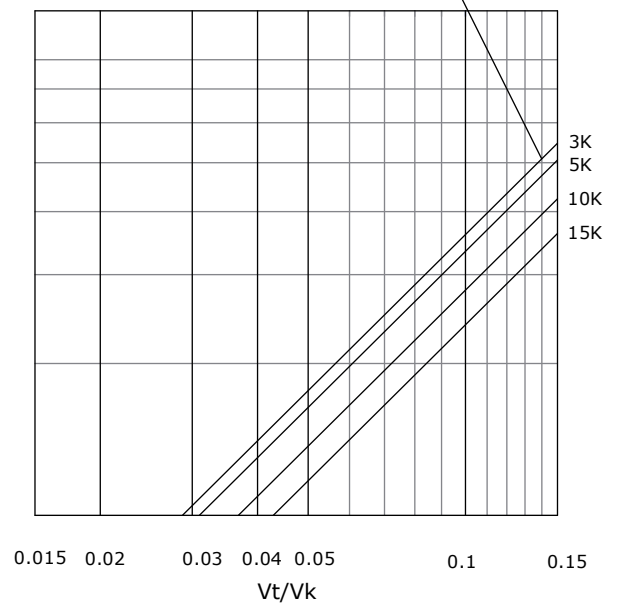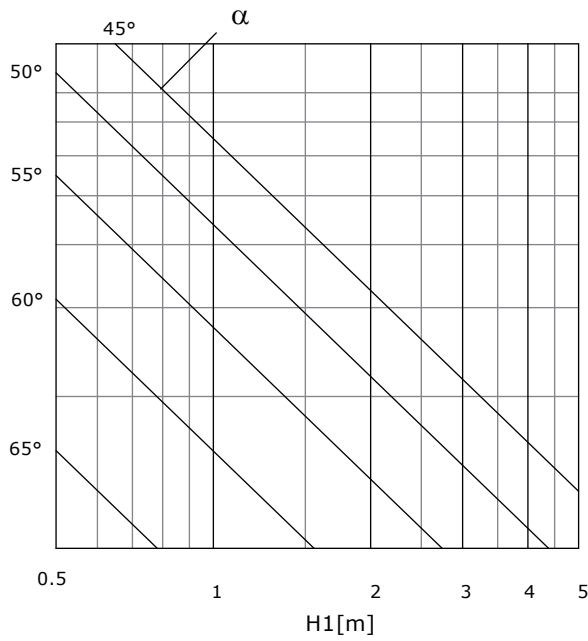



HEATING

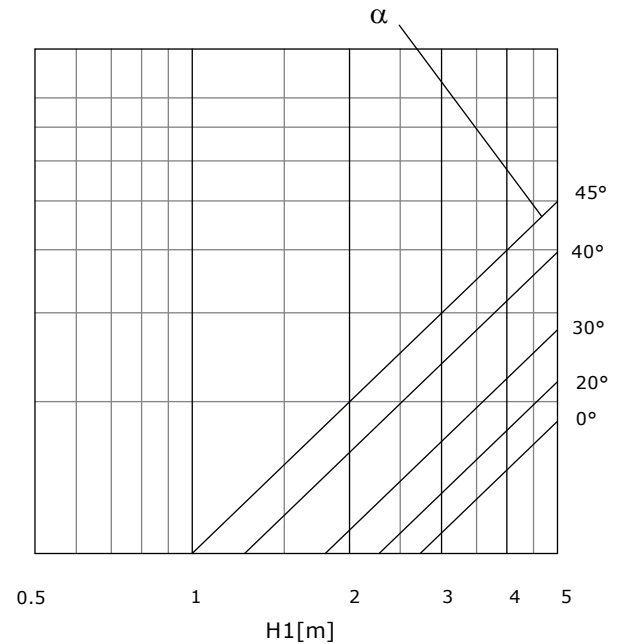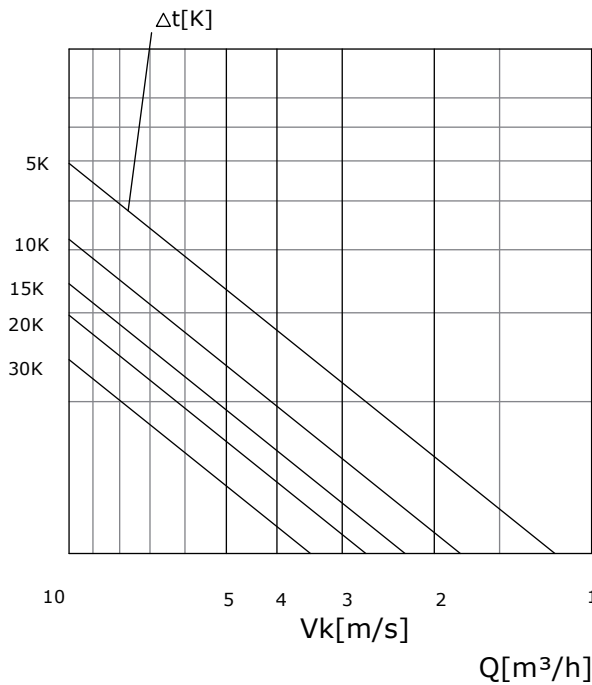



Angle setting size 250

α -setting RWR-4 250

COOLING

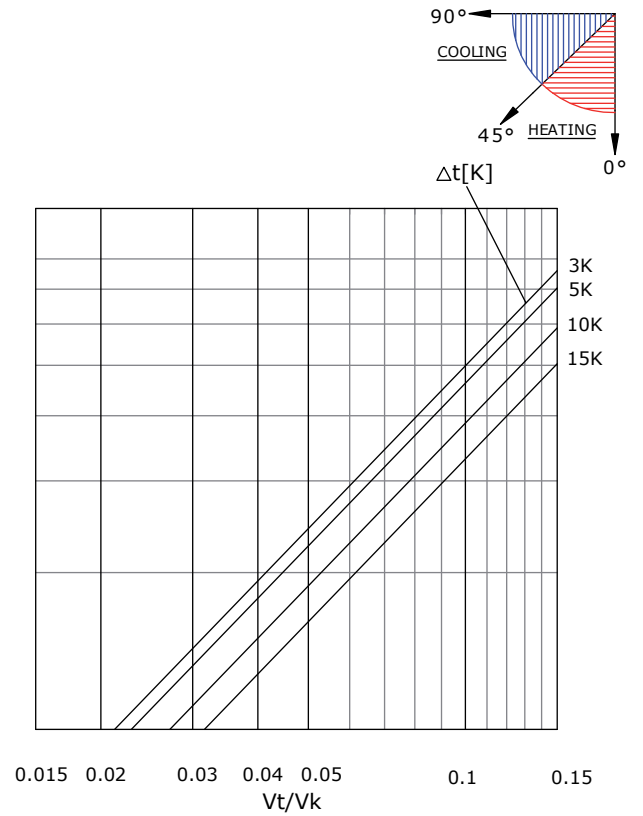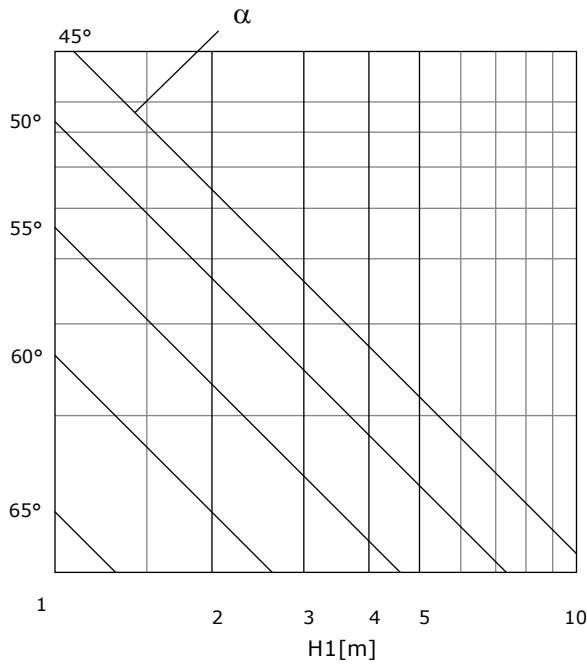




HEATING

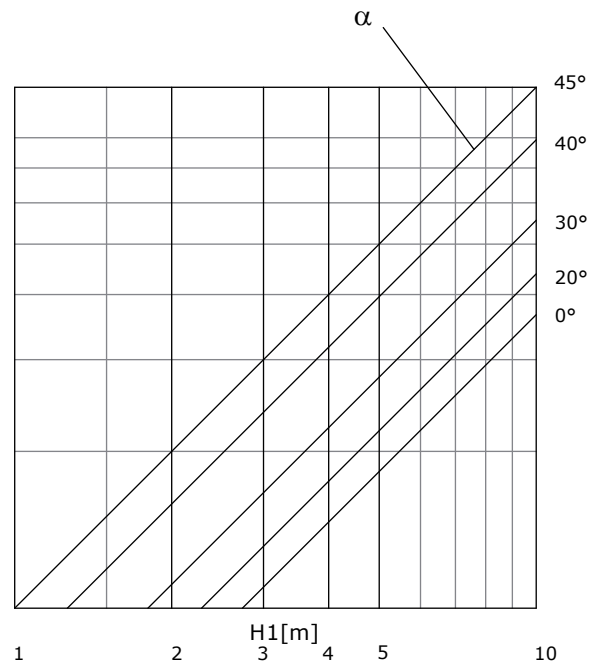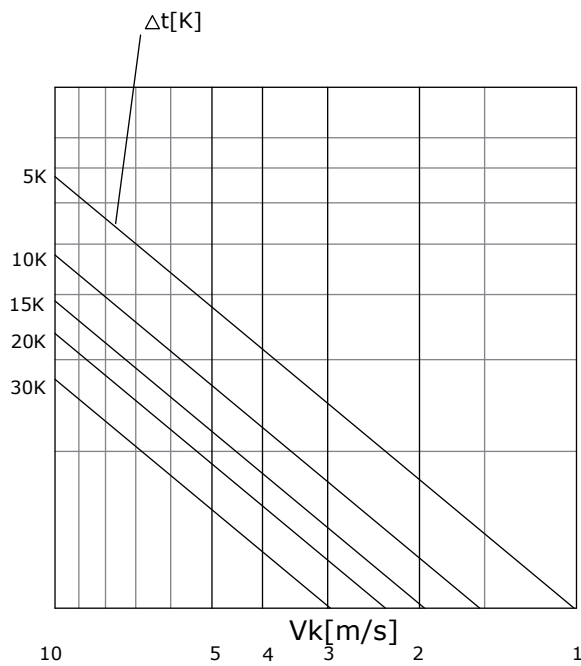



Angle setting size 315

α -setting RWR-4 315

COOLING

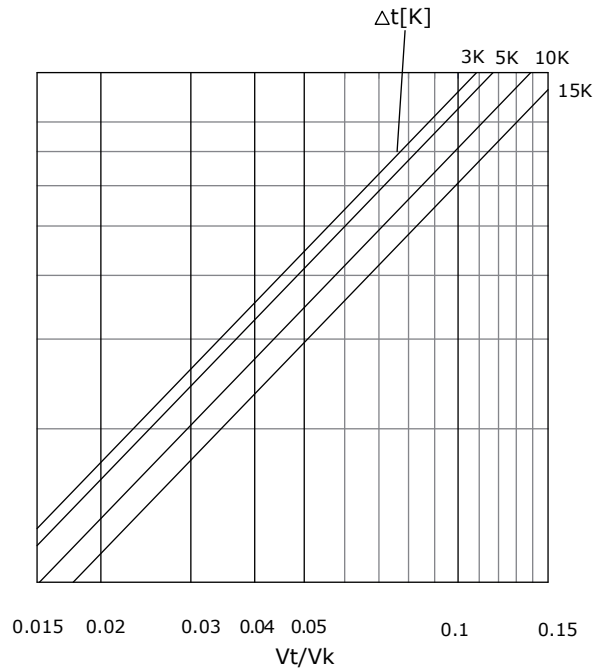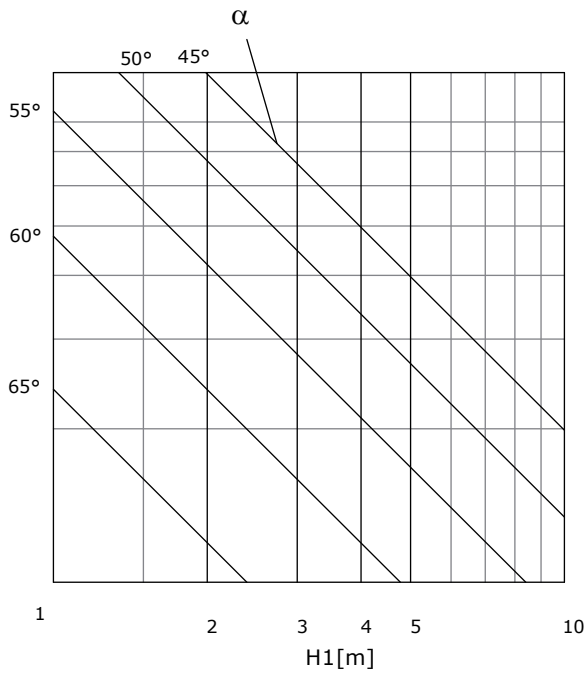



HEATING

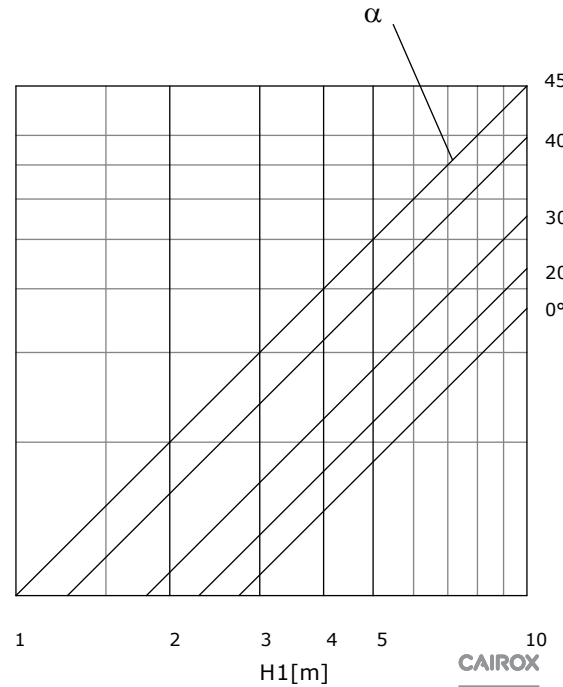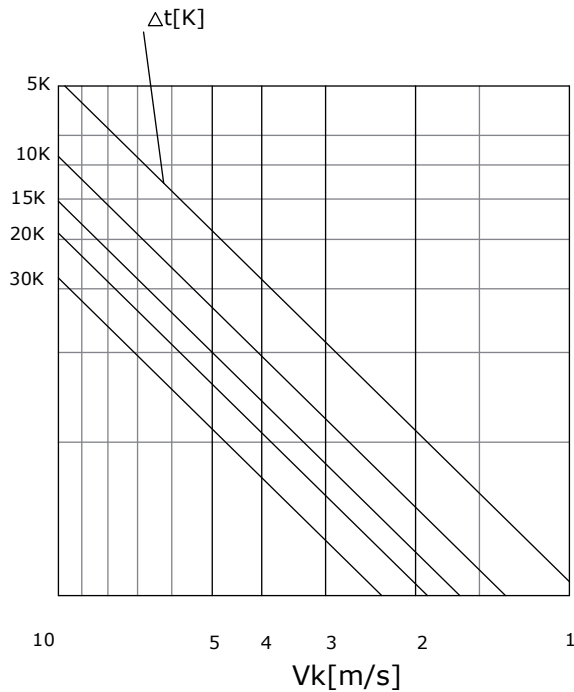



Angle setting size 400

α -setting RWR-4 400

COOLING

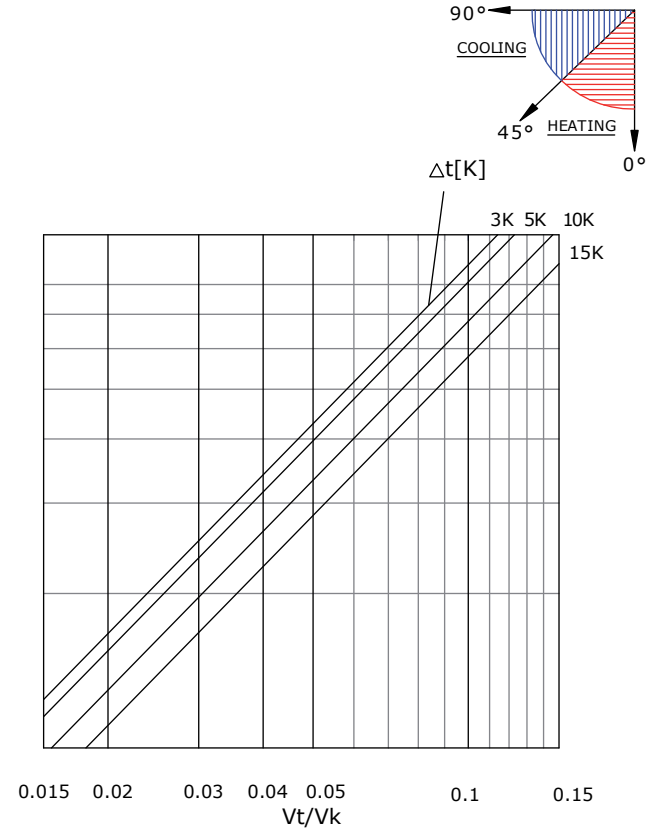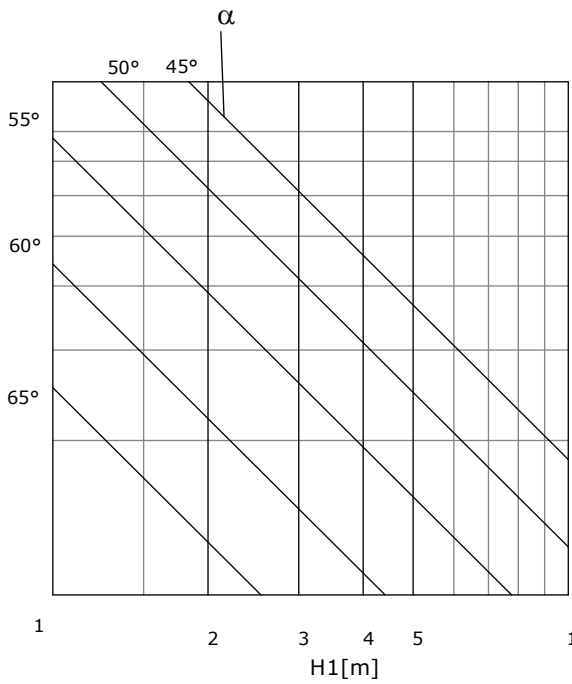

HEATING


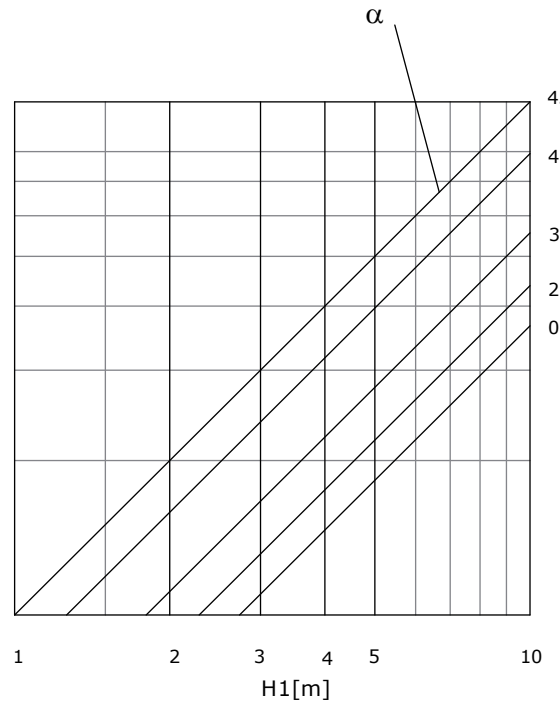
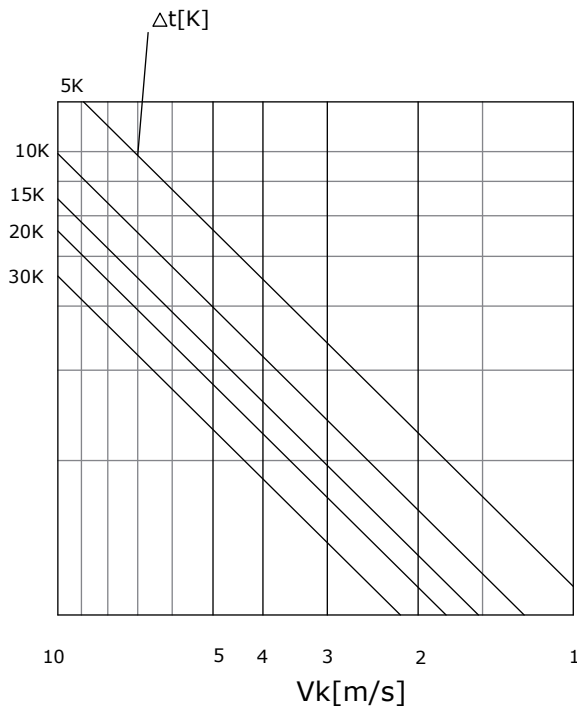


Q [m³/h]



Angle setting size 500

α -setting RWR-4 500

COOLING

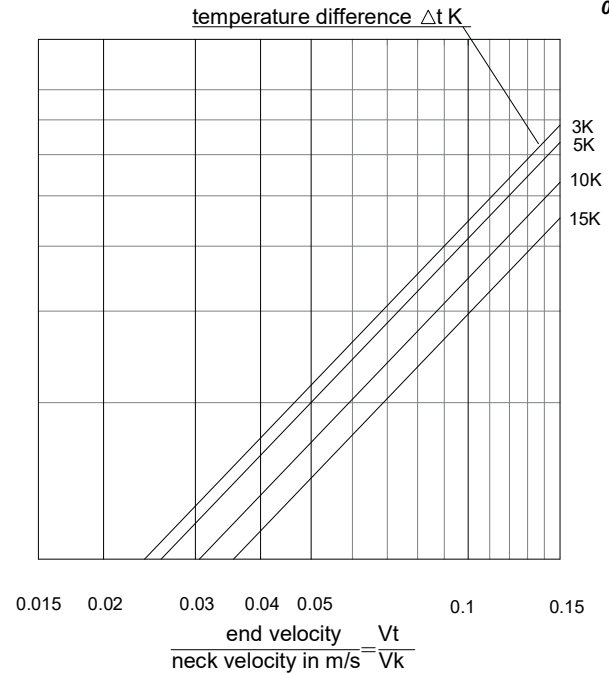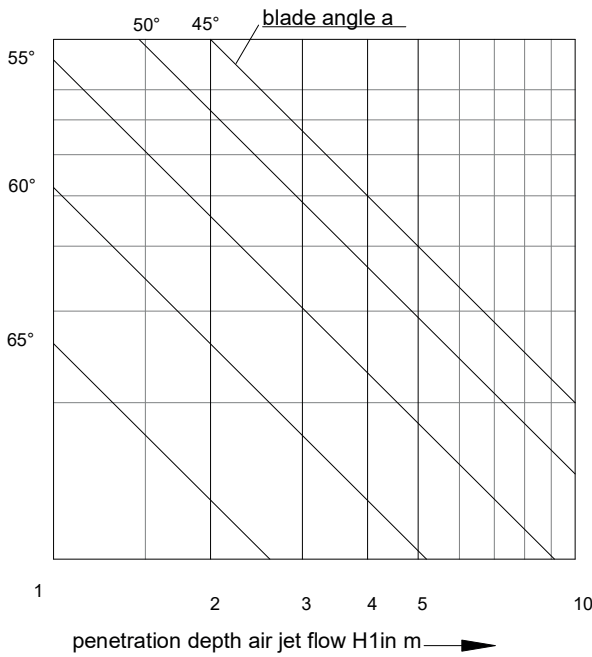

HEATING


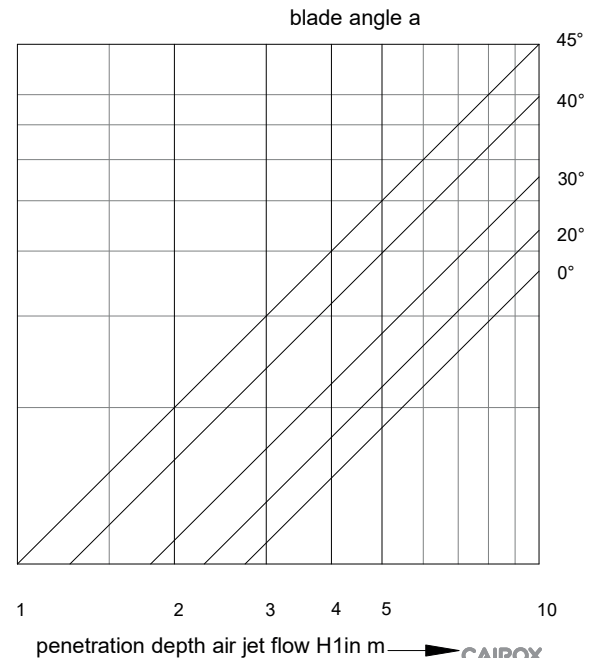
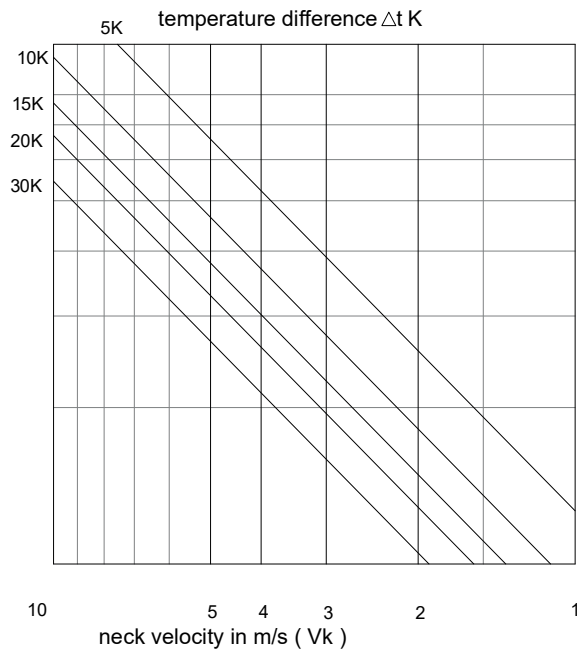


air flow (m3/h)

Angle setting size 630

α -setting RWR-4 630

COOLING

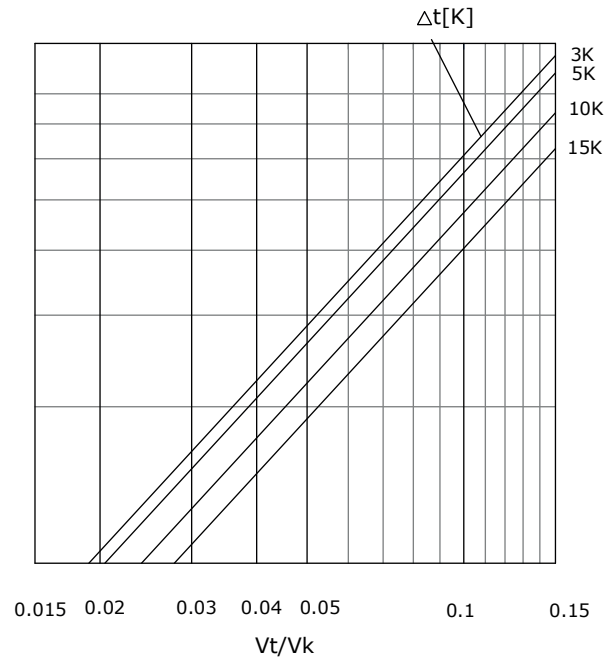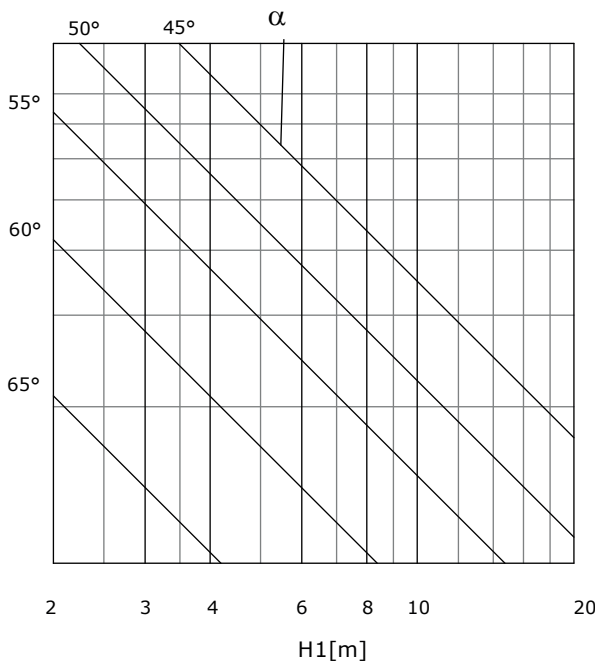

HEATING

