



## VAV dampers with Belimo actuator type VAV-CSB BELIMO

VAV-CSB air flow regulator can be used both for variable and constant flow and, if appropriate, for forced shut-off for both air supply and air exhaust

### Application

- Regulating of air volumes to change the temperature or air quality in a room
- Control and regulate the supply air flow and exhaust air flow
- Airflow range can be set between two set values or as constant airflow

### Material

- Galvanized steel

### Composition

- Operating range is between 2 to 12 m/s
- Integrated flow measurement with separate measurement nipples for control and manual measurement
- The casing of the damper is equipped with a EPDM rubber blade seal conforms to air tightness class C in accordance with EN1751
- Blade air tightness class 3 in accordance with EN1751 due to EPDM seal around the blade
- The VAV-damper can be placed in any position in accordance with the airflow direction
- Manual measurement of the air flow can be performed without disturbing the control circuit through a separate pressure outlet on the orifice plate of the flow variator
- All duct connections have spigot dimensions and are equipped with sealing rings made of rubber

### Controls

- Controller type Belimo LMV-D3-MP of 5Nm (size 100 up to 500) and Belimo NMV-D3-MP of 10Nm (size 630) are pressure regulated actuators for pressure independent controls. Settings can be done by using the Assistant App\* (smartphone) with NFC connection (Near Field Communication) or by using the service tool ZTH (PC-tool).
  - Operating range 0-10V or 2-10V (Standard set on 2-10V)
  - Units of airflow: l/s or m<sup>3</sup>/h
  - Minimum adjustable air volume set at air velocity at +/- 2m/s and maximum adjustable airvolume set at air velocity of 12m/s
  - Differential pressure range  $\Delta p @ V_{nom}$  38 - 500 Pa
  - Running time over the full actuator range : 100s
  - Power consumption 5 Nm: 2W, 3.5VA / 10 Nm: 3W , 5VA
  - Supply voltage 24V AC/DC
- \* Assistant App available in App Store & Google Play Store  
 \* For iPhone an ZIP-BT-NFC converter is needed!

**Options**

- Other communication types (ModBus, KNX) and other brands of servomotors available on request
- Insulated version **VAV-CSB-I** available upon request, standard insulation thickness 50mm

**Accessories**

- Sound attenuator, type **SAR-G**
- Water heater, type **CWA**
- Electric heater, type **CVA**

**Order example**

- **VAV-CSB 100 + SAR 100**

Explanation:

**VAV-CSB** = Circular Airflow regulator type

**100** = Diameter of the damper

**SAR 100** = Sound attenuator type

VAV-CSB			Air flow Characteristics																				
			Ø100				Ø125				Ø160				Ø200				Ø250				
Vk [m/s]			3	6	9	12	3	6	9	12	3	6	9	12	3	6	9	12	3	6	9	12	
Q [m³/h]			85	170	257	344	130	263	396	530	216	434	652	871	337	680	1027	1370	529	1065	1604	2144	
ps = 125 Pa	Lw [dB/Okt]	f [Hz]	63	34	41	46	50	40	48	52	58	43	51	55	61	49	57	61	67	52	62	65	71
		125	40	53	55	55	42	56	57	58	44	58	59	60	46	60	61	62	47	63	54	64	
		250	37	49	50	54	38	51	53	57	41	53	55	59	43	55	57	61	45	58	60	63	
		500	35	44	46	50	37	48	47	53	39	49	49	55	41	51	51	57	44	54	53	59	
		1000	34	40	41	46	35	42	42	47	38	44	44	49	40	46	46	51	43	48	49	53	
		2000	33	37	37	40	35	38	39	42	37	40	41	44	39	42	43	46	41	44	44	48	
		4000	32	35	25	36	34	37	37	39	36	39	39	41	38	41	41	43	39	42	42	54	
8000	33	34	34	35	35	37	38	38	37	38	39	39	37	39	40	40	38	40	40	51			
Lw(A) [dB(A)]			39	46	48	51	40	47	52	55	45	48	52	55	44	52	56	58	46	54	58	61	
ps = 250 Pa	Lw [dB/Okt]	f [Hz]	63	38	44	49	58	45	52	56	65	49	55	59	69	55	61	66	76	54	60	64	72
		125	43	56	62	66	46	59	64	68	48	62	66	71	50	64	70	74	49	62	54	65	
		250	42	53	58	62	45	57	60	64	47	57	62	67	49	60	65	70	46	58	60	63	
		500	41	50	56	58	43	52	58	60	45	54	61	62	47	56	54	64	43	53	52	58	
		1000	39	47	51	52	42	49	53	54	44	51	56	56	44	53	55	58	41	49	47	52	
		2000	38	44	48	48	40	46	50	51	42	48	52	53	43	51	54	54	40	44	44	47	
		4000	36	42	45	46	39	44	49	49	40	46	49	52	41	49	53	51	39	42	43	53	
8000	32	37	40	43	38	43	47	55	38	42	44	48	42	48	52	53	38	39	40	50			
Lw(A) [dB(A)]			47	53	56	58	47	54	59	60	51	56	59	62	53	60	63	65	46	52	57	61	
ps = 500 Pa	Lw [dB/Okt]	f [Hz]	63	42	46	54	57	50	54	62	65	56	60	68	71	61	65	73	76	64	68	76	79
		125	47	62	70	72	51	64	72	74	53	66	74	76	55	68	76	77	57	70	78	80	
		250	46	59	67	68	50	61	69	70	50	63	71	72	54	65	72	72	56	67	75	76	
		500	45	56	61	63	48	59	64	65	49	60	65	66	52	61	67	68	55	64	69	71	
		1000	44	62	56	58	46	55	59	60	48	56	60	61	50	48	62	64	53	60	64	66	
		2000	43	51	53	55	45	53	55	57	47	55	57	59	49	47	59	61	51	59	61	63	
		4000	41	46	50	52	42	49	52	55	45	50	54	57	46	42	56	59	48	54	58	61	
8000	40	45	49	51	41	46	50	52	45	50	54	56	46	41	55	58	48	53	57	59			
Lw(A) [dB(A)]			51	57	61	64	53	60	63	66	55	61	65	68	57	63	67	70	59	65	69	72	
ps = 1000 Pa	Lw [dB/Okt]	f [Hz]	63	59	63	70	74	61	65	72	76	63	67	74	78	65	69	75	80	67	71	78	82
		125	56	62	70	71	58	63	72	75	60	66	74	77	62	68	76	79	64	70	78	81	
		250	52	61	68	70	54	62	71	74	57	65	73	76	59	67	75	78	61	69	77	80	
		500	51	59	64	69	53	62	68	73	56	63	70	75	58	65	71	76	60	68	73	78	
		1000	52	58	63	67	54	60	67	71	58	62	69	72	58	64	70	74	60	66	72	76	
		2000	51	57	62	66	53	59	66	69	57	61	68	71	57	63	69	72	59	65	71	74	
		4000	49	55	59	63	51	58	62	66	55	59	64	67	56	61	65	68	57	63	66	71	
8000	49	56	58	62	50	57	61	65	54	59	63	67	56	61	65	67	56	63	65	68			
Lw(A) [dB(A)]			56	63	69	75	58	65	73	79	62	69	75	81	63	70	77	83	66	73	79	84	

**Symbols and specifications**

- VAV-CSB = Variable or constant volume damper
- Q = In-Duct air volume in m³/h
- Qmin - Qmax = minimum and maximum set point in m³/h
- Vk = Average velocity in the damper in m/s
- Ps = Pressure drop over the damper according to the position of the blade
- Lw [dB/Okt] = Sound power given at a specific pressure drop Ps for the frequencies f[Hz] from 63 up to 8000 Hz in dB



Selection table			
Type VAV	ØD [mm]	Q <sub>min</sub> [m <sup>3</sup> /h]	Q <sub>max</sub> [m <sup>3</sup> /h]
VAV-CSB 100	100	37	343
VAV-CSB 125	125	54	540
VAV-CSB 160	160	90	900
VAV-CSB 200	200	145	1459
VAV-CSB 250	250	217	2215
VAV-CSB 315	315	380	3680
VAV-CSB 355	355	482	4275
VAV-CSB 400	400	615	6047
VAV-CSB 500	500	973	9484
VAV-CSB 600	600	1435	12482

Radiated sound data								
VAV-CSB		ΔL <sub>w</sub>						
Size		100	125	160	200	250	315	400
f [Hz]	63	31	30	30	29	25	22	20
	125	30	29	29	28	24	22	19
	250	27	25	24	23	20	19	18
	500	21	21	21	22	18	17	17
	1000	19	18	19	21	16	15	15
	2000	11	12	16	18	14	13	12
	4000	11	12	14	16	12	11	10
	8000	9	10	12	13	11	10	10

VAV-CSB-I		ΔL <sub>w</sub>						
Size		100	125	160	200	250	315	400
f [Hz]	63	33	32	32	31	27	24	22
	125	28	29	32	31	27	25	23
	250	26	24	24	26	23	23	22
	500	26	27	28	33	29	29	29
	1000	34	33	34	39	35	34	35
	2000	33	33	38	44	42	41	39
	4000	37	37	40	43	36	35	33
	8000	31	32	34	35	31	29	29

$$L_{w2} = L_w - \Delta L_w$$

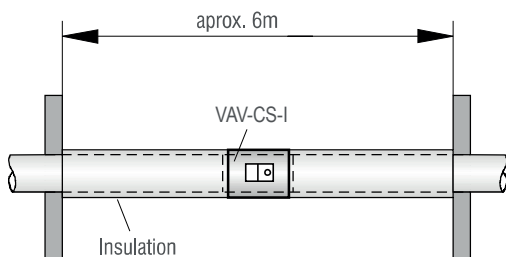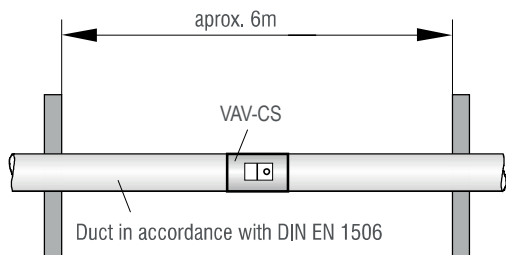


$$L_{w2} = L_w - \Delta L_w$$

L<sub>w2</sub> = Case radiated noise in dB


L<sub>w</sub> = Sound power given for the frequencies f [Hz] from 63 up to 8000 Hz

ΔL<sub>w</sub> = Correction values for case radiated noise in dB

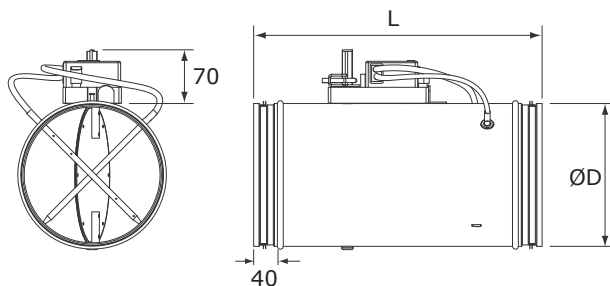

	Dimensions	
	ØD [mm]	L [mm]
VAV-CSB 100	98	400
VAV-CSB 125	123	400
VAV-CSB 160	158	400
VAV-CSB 200	198	400
VAV-CSB 250	248	500
VAV-CSB 315	313	600
VAV-CSB 355	353	600
VAV-CSB 400	398	600
VAV-CSB 500	498	750
VAV-CSB 630	628	800

### Mounting

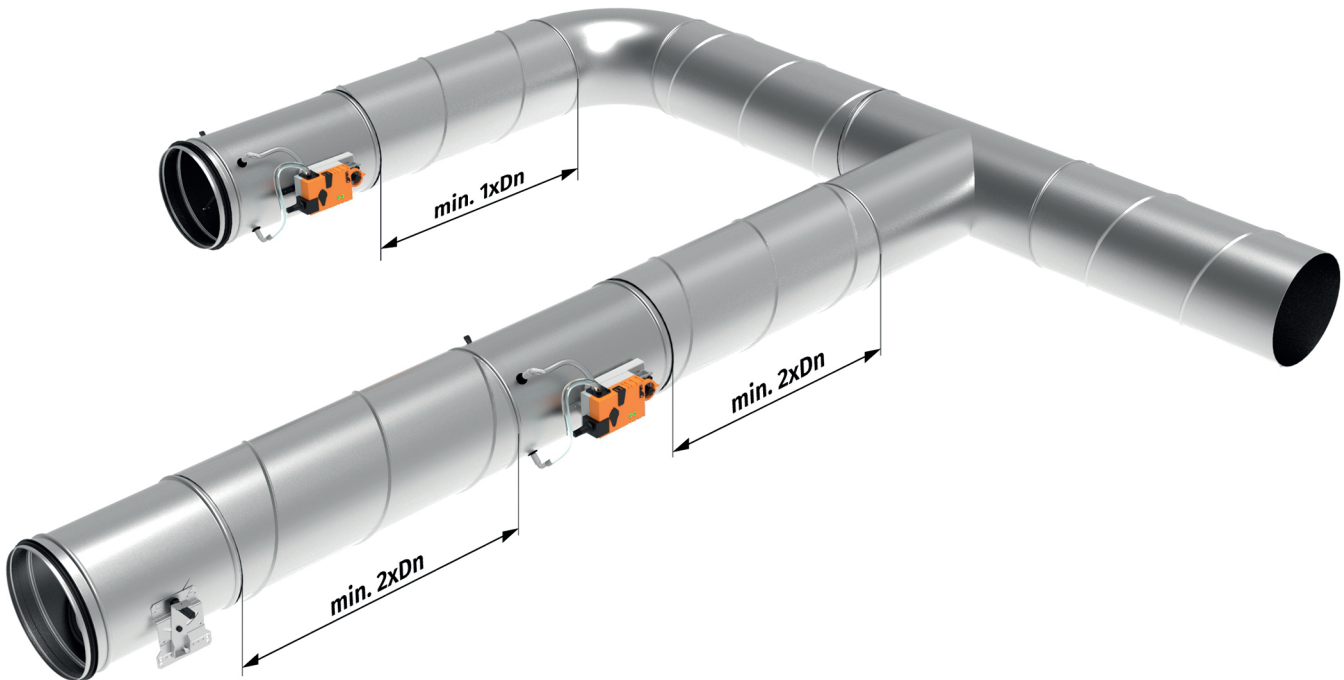

Controle modes

