

- Clamping strips
- Mounting accessories
- Nylon clamps



UV resistant nylon straps type NCA-BL UV

Nylon clamps

Brand

- Sufix

Application

- To fix and connect flexible ducts
- Allround fixing purposes

Material

- Made of high strength nylon
- Flame class UL-94V-2, self-extinguishing, fungus inert
- Working temperature from -40 tot 85°C

Color


- Black (NCA-BL UV): to be used both indoor and outdoor, UV resistant

Models

- Length according to the diameter, range from 46 up to 380 mm

Accessories

- To use with **TNK1** for tighten and cut off nylon clamps.

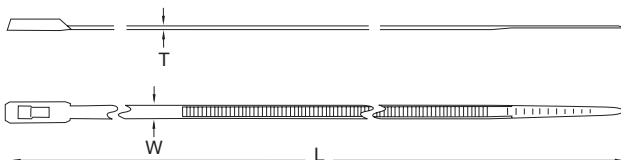

	Dimensions		
	L [mm]	T [mm]	W [mm]
NCA 0-46 BL UV	160	1.6	4.8
NCA 0-55 BL UV	200	1.6	4.8
NCA 0-89 BL UV	310	1.6	4.8
NCA 0-100 BL UV	432	1.5	4.8
NCA 0-125 BL UV	450	2	8
NCA 0-185 BL UV	610	2	9
NCA 0-246 BL UV	812	2	9
NCA 0-270 BL UV	914	2	9
NCA 0-380 BL UV	1219	2	9



Minimum Tensile strength values			
Type	[N] 21°C	[N] +85°C	[N] -40°C
NCA 0-46 BL UV	220	165	165
NCA 0-55 BL UV	220	165	165
NCA 0-89 BL UV	220	165	165
NCA 0-100 BL UV	220	165	165
NCA 0-125 BL UV	530	413	413
NCA 0-185 BL UV	800	600	600
NCA 0-246 BL UV	800	600	600
NCA 0-270 BL UV	800	600	600
NCA 0-380 BL UV	800	600	600