

- Quick cable suspension system
- Standard
- Loop finishing



Suspension systems with cable type LS LA

Hanging system with loop finishing

Brand

- Sufix

Application

- For suspension by wrapping around building features.

Specifications

- Absorption of vibration of 77% (cfr threaded rods 52%)
- Diameter thread: 1,5 mm
- Breaking force included safety margin is calculated 1 on 5
- With QS1A quick suspension: 30 kg
- Packaging of 10 cables with 10 QS1A quick locks

Models

- Available in standard lengths of 2 m and 5 m

Related versions

- Upon request available in other lengths
- Dia 3 mm: max. 90 kg available on demand
- Also available with stainless steel cable, on demand

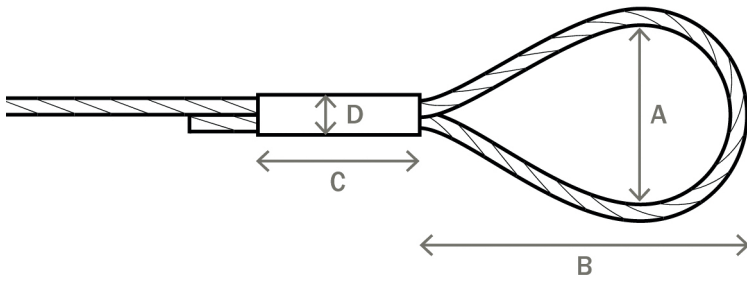
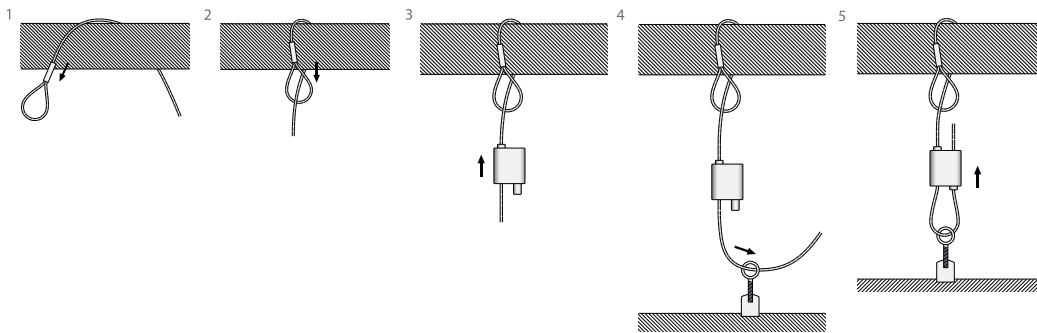
Accessories

- Wire rope cutter, type **PINC**
- Wire anchor, type **HK**

Text for tender

- Steel galvanized wire cable suspension system with quick locking device **QS1A** for suspension of HVAC devices, ducts, ... The end of the cable is provided with a loop end for fixing to the ceiling or on any upper building part
- Sufix Type **LA**

| | Dimensions | | | |
|----|------------|----------|--------|--------|
| | A [±/mm] | B [±/mm] | C [mm] | D [mm] |
| LA | 17 | 35 | 12.50 | 6 |

**Mounting methods****Extra photo**