


## LS OA90

- Quick cable suspension system
- Standard
- Eyelet end 90°

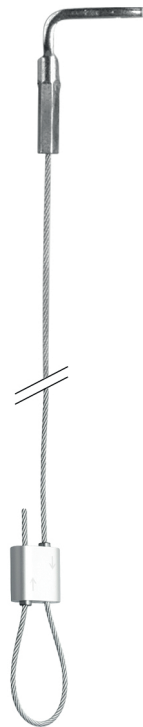

## Suspension systems with cable type LS OA90

Suspension with eyelet 90° end fixing

### Brand

- Sufix

### Application

- For easy attachment in wood, using M6 bolts
- Suitable for fixation on different appliances

### Specifications

- Absorption of vibration of 77% (cfr threaded rods 52%)
- Diameter thread: 1,5 mm
- Breaking force included safety margin is calculated 1 on 5
- With QS1A quick suspension: 30 kg
- Packaging of 10 cables with 10 QS1A quick locks

### Models

- Available in standard lengths of 2 m and 5 m

### Related versions

- Dia 3 mm: max. 90 kg available on demand
- Also available with stainless steel cable, on demand
- Upon request available in other lengths


### Accessories

- Wire rope cutter, type PINC


### Text for tender

- Steel galvanized wire cable suspension system with quick locking device **QS1A** for suspension of HVAC devices, ducts, ... The end of the cable is provided with an 90° bended eye end for fixing to the ceiling or on any upper building part
- Sufix Type **OA90**

	Dimensions		
	A [mm]	B [mm]	C [mm]
OA90	7.50	29	38

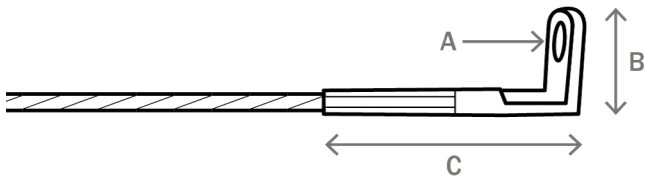

**Mounting methods**

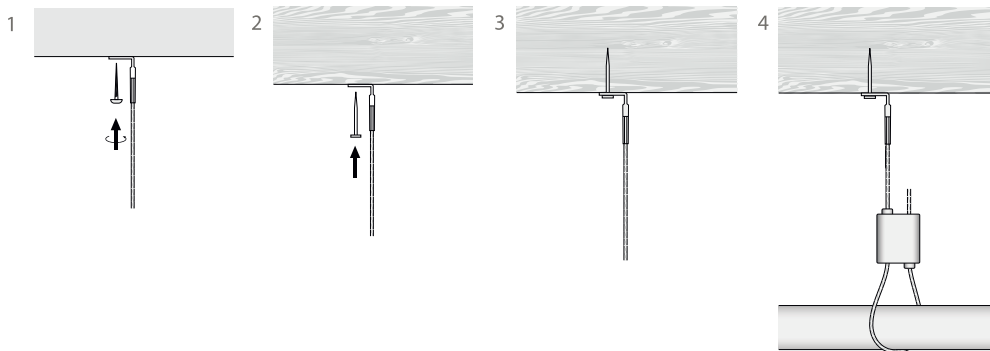

**Extra photo**

