



## Insulated flat access doors type IPD

Access door

### Brand

- SUFIX

### Application


- To give access into a rectangular duct

### Material

- Galvanized access door with a double-sided panel insulated with 25 mm of glassfiberwool


### Specifications

- Double-sided panel
- Glasswool insulation of 25 mm
- Quick-acting closures

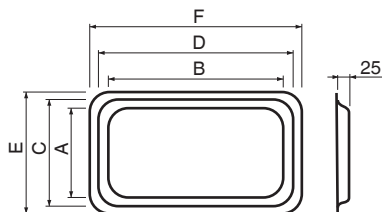




IPD-0

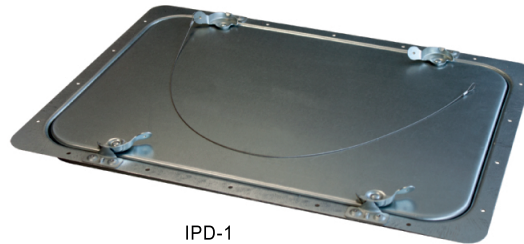

IPD-1

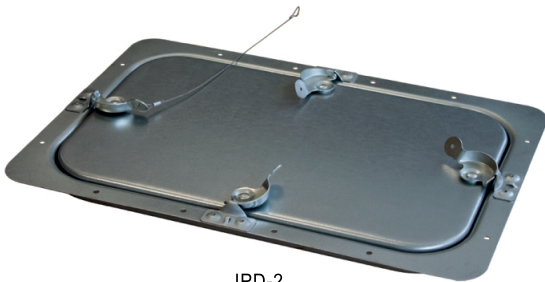

IPD-2



IPD-3

	Dimensions					
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]
IPD-0	463	608	500	649	548	699
IPD-1	327	463	368	500	418	548
IPD-2	198	332	240	375	286	422
IPD-3	116	206	150	240	185	288