


- Galvanised steel frame with filtermedia
- Filterclass F7 - ePM1 60%
- Thickness 47 mm

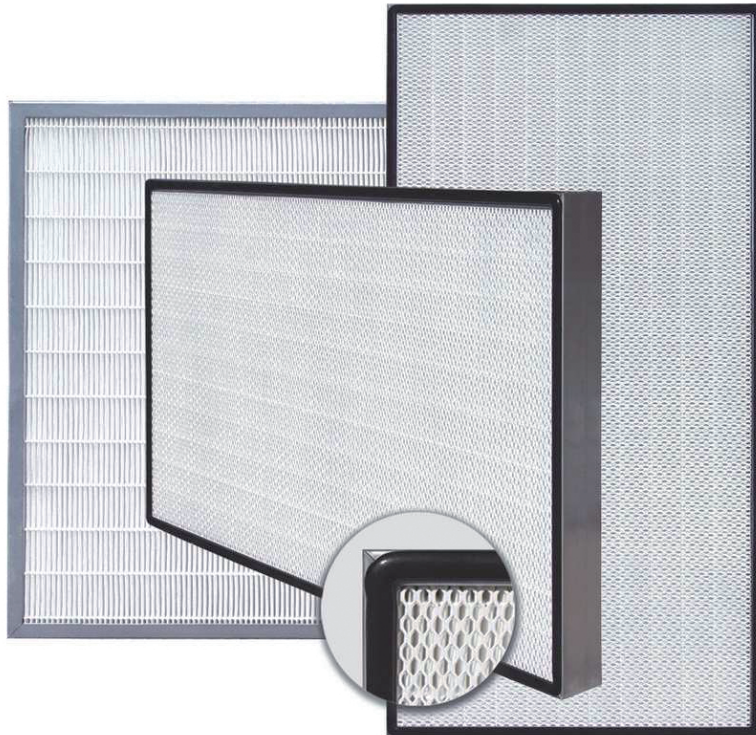

## Compactfilter F7 type COMP7

Compactfilter with filterclass F7 - ePM1 60% ISO 16890

### Application

- Air filtration in air handling units and diffusers
- Air conditioning units

### Characteristics

- Yield according to EN779: F7
- ISO 16890 ePM1 60%
- Good airtightness
- High efficiency
- Large surface
- Designated final pressure drop: 450 Pa
- Economical final pressure drop : 250Pa
- Maximum temperature at continuous working: 100°C
- Relative Humidity: 100%

### Colour

- Galvanized steel with white filtermedia

### Composition

- Solid filter cell, provided with mini pleats
- Medium: Synthetic mini pleated glassfiberpaper
- Galvanized steel frame
- Dividers with hotmelt
- Sealant of polyurethane

### Mounting

- To be inserted in filter socket

**Order example**

■ **COMP7 287x592x47MM**


Explanation

**COMP7** = Type compact filter with F7 - ePM1 60% Filtermedia

**287** = Filterwidth in mm

**592** = Filterheight in mm

**47 MM** = Filterthickness in mm

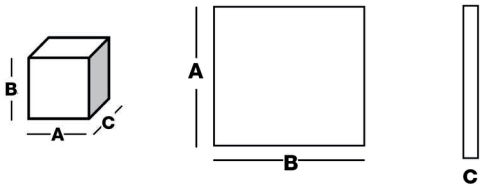

Dimensions			
COMP7	A	B	C
COMP7 287 X 592 X 47 F7	287	592	47
COMP7 592 X 592 X 47 F7	592	592	47