


Acoustic module type MVX-BA

Acoustic module

Composition

- Placed on the inlet or exhaust side of fan module.
- Attenuating by means of mineral fibre splitter.
- Maximum pressure loss : 30 Pa. See the datasheet MVX-BF for the pressure loss graph.
- Supplied as a separate component, unmounted. Factory mounted upon request.

	Sound attenuation							
	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
MVX-BA 4	0	2	6	10	25	28	18	10
MVX-BA 5	1	3	7	12	22	21	17	10
MVX-BA 6	3	5	10	20	24	24	20	11
MVX-BA 7	2	4	9	15	23	22	17	7
MVX-BA 8	3	5	10	20	26	27	21	11
MVX-BA 9	1	4	10	19	24	22	14	7

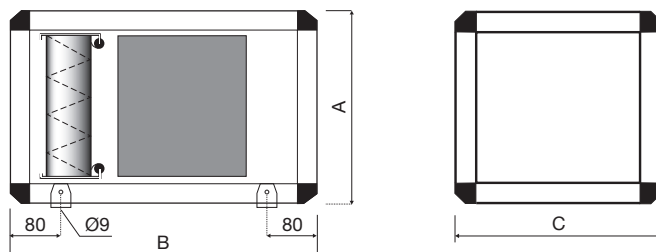

	Dimensions			
	A [mm]	B [mm]	C [mm]	Kg
MVX-BA 4	445	845	445	35
MVX-BA 5	545	945	545	50
MVX-BA 6	645	1045	645	70
MVX-BA 7	745	1190	745	95
MVX-BA 8	845	1370	970	135
MVX-BA 9	945	1445	1170	165