



External displays for Corrigo 5E type EASY 5.0

Remote display for **CORRIGO 5E**
Touch screen controller 4,3"


Application

- Programming and read out of **CORRIGO 5E** controller
- MASTER controller
- Suitable for all CALADAIR heat recovery units: GTDHR/V, HEXAMOTION(-S), FREETIME(-S), SILVERTOP, NEOTIME(Premium/First)

From serial number 225191

Specifications

- Touch screen controller 4,3" - IP65
- The cables (2m) are included and can be extended to max. 100 rmt.
- One cable with 2x0,75mm² for power supply 24Vdc and one Belden cable 3106A twisted pair for communication
- Connection diagram: see below

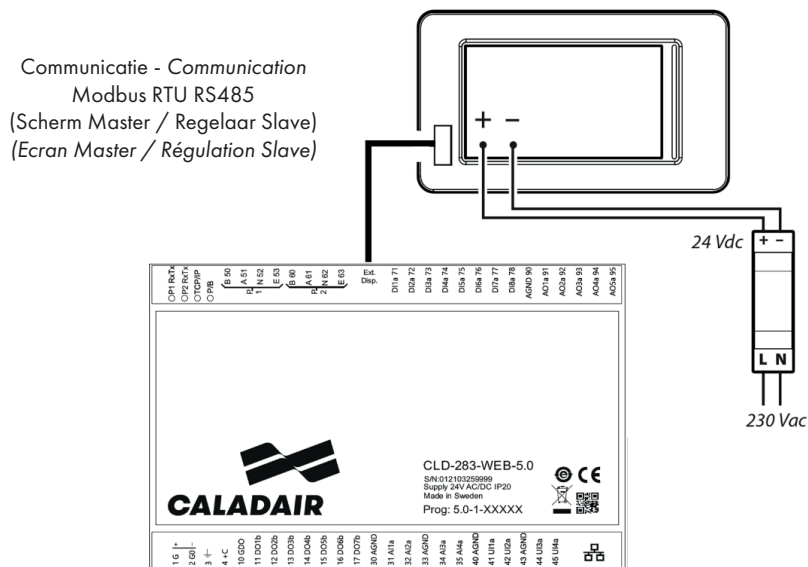

Het scherm wordt gevoed via een transfo 230Vac / 24Vdc en communiceert met de regelaar CLD-283 via Modbus RTU RS485 via de poort "Ext DISP". Het scherm is master en de regelaar is slave.

L'écran est alimenté par un transformateur 230Vac / 24 Vdc et communique avec le régulateur CLD-283 en Modbus RTU RS485 par le port «Ext DISP». L'écran est maître et le régulateur est esclave.

Dimensions

