
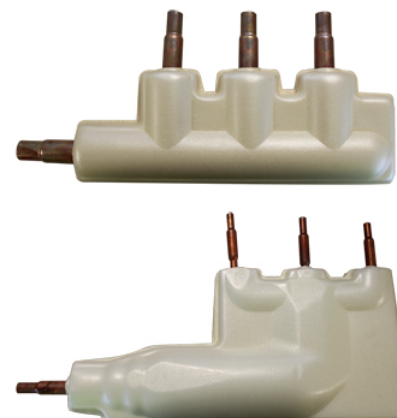


UTP-SX SM

- Fujitsu
- Super Multi
- Accessories
- Installation equipment
- Multi-split

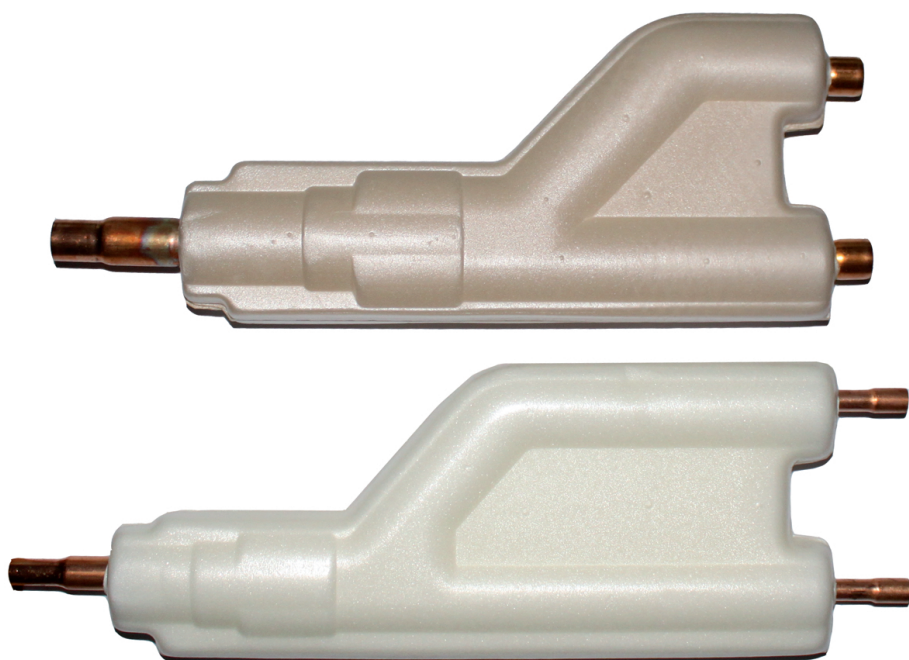

Accessories super multi - Separation tubes type UTP-SX SM

Accessorie Super Multi - Seperation tube

Brand

- Fujitsu - Airstage

Product

- Installation equipment, separation tubes

Application

- Deviding the variable refrigerant flow to the indoor units

Features

- The separation tube obtain an liquid and gas separation tube.
- Supplied with insulation and required to use the insulation after brazing the pipes.
- Three different kinds of separation tubes are available for the development of the refrigerant circuit.
- Vertikal mounting position of the separation kit is allowed.
- Max.15° as installation angle in horizontal mounting position.
- T-tubes are forbidden because it causes a uneven refrigerant flow
- Minimum distance between two separation tubes or bend of 90° is 500mm in straight part. To prevent the outdoor unit mulfunction and generation of refrigerant noise.
- Please consult installer for more information if required
- Welding under dry nitrogen is required, if not used, it will be caused to damage for compressor and clog the strainer and electronic expansion valve.

Applicable outdoor units

- Type **AOYG 36/45/54 KBTB**
- Type **AOYG 36/45/54 KRTA**
- Type **AOYG 72/90 LRLA**

Specifications			
Model (Buitenunit)	Type	Aantal binnenunits	Kit naam
AOYD 36 LATT	Twin	2	UTP-SX236
AOYD 45 LATT		2	UTP-SX254
AOYD 54 LATT		3	UTP-SX354
AOYD 54 LATT	Triple		