

Accessories multi 8 - Branch box type UTP-PY

Brand

- Fujitsu

Product

- Branch Box

Application

- Divides the variable refrigerant flow to the indoor units.

Features

- The branch box can be installed on a wall or suspended from the ceiling
- Vertical mounting (on the wall and with "TOP SIDE" on top)
- Horizontal mounting (on the ceiling and "TOP SIDE" on top)
- Always provide a service hole for maintenance and inspection
- It is not necessary to perform any draining procedures on the branch box
- The slope of the top side must be within $\pm 5^\circ$ in all directions of the horizontal plane
- Minimum distance of the copper tubes between the branch box and the indoor unit: 3m
- Maximum distance of the copper tubes between the branch box and the indoor unit: 15m
- It is forbidden to braze the copper tubes to the branch box
- The branch box is equipped with flare connections

Applicable outdoor units



- Type **AOYG 45 LBT8**

Specifications			
Technical specifications "BRANCH BOX"		UTP-PY02A	UTP-PY03A
Connectable indoor units		1 - 2	1 - 3
Minimal combination of connections	kBtu	7	7
Maximal combination of connections	kBtu	62	62
Absorbed power	W	10	10
Nominal current	A	0,05	0,05
Maximal absorbed current	A	3	3
Type of refrigerant		R410A	R410A
Power supply	V	230/1	230/1
Power supply range	V	198-264	198-264
Dimensions (H x L x D)	mm	195 x 433 x 370	195 x 433 x 370
Weight	kg	9	9
Principal copper tube	inch	3/8 - 5/8	3/8 - 5/8
Secondary copper tubes	inch	1/4 - 1/2	1/4 - 1/2
Connection method of the copper tubes		Flare	Flare
Operating range (Temperature)	°C	-15-46	-15-46
Operating range (Relative humidity)	%	< 80	< 80
Cable section power supply	mm ²	3G 2,5	3G 2,5
Automatic fuse	A	16	16


* Specifications and design are subject to changes for further improvement without notice

Dimensions


UTP-PY02A

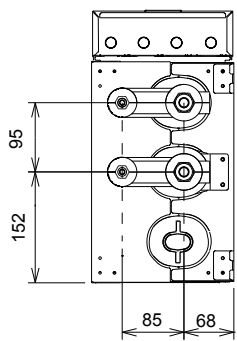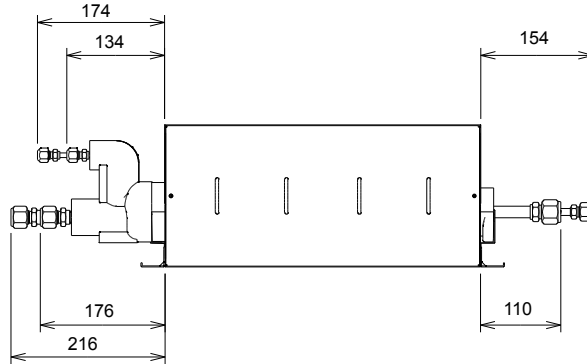


Indoor unit side

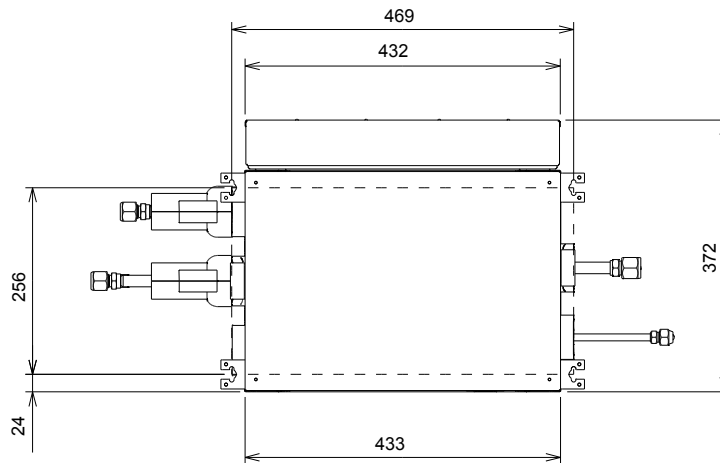


Ceiling hanging

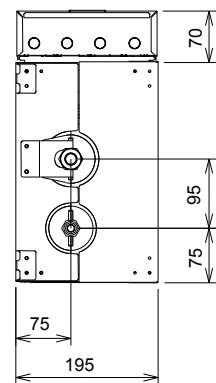

Outdoor unit side


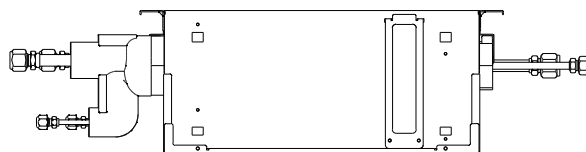


Wall hanging

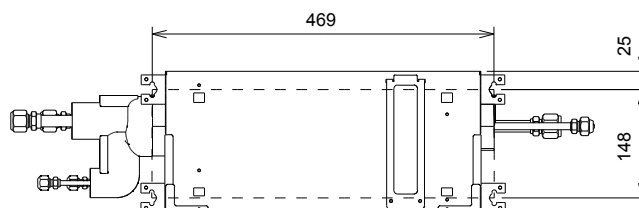


Dimensions


UTP-PY03A

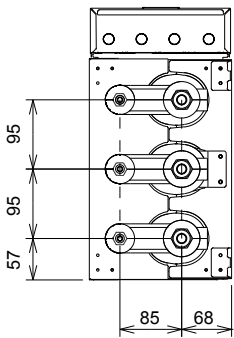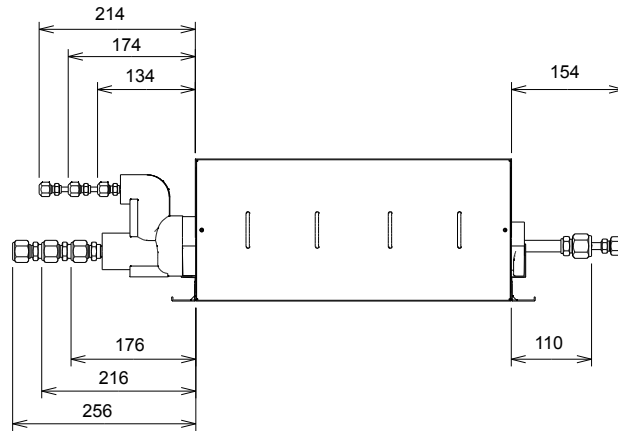


Indoor unit side

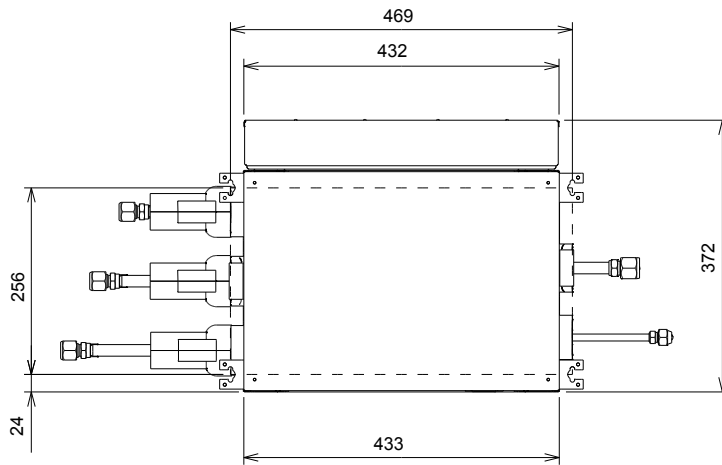

Ceiling hanging

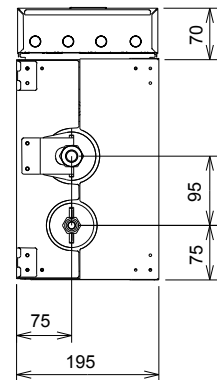

Outdoor unit side

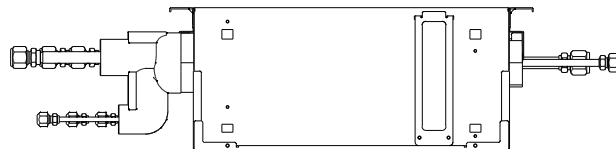

Wall hanging