

Accessories multi 8 - Separation tube type UTP-SX248A

Brand

Fujitsu

Product

Separation tube

Application

Dividing the variable refrigerant flow to the branch box

Features


- The separation tube contains a liquid and a gas separation tube Supplied with insulation and required to use the insulation
- One separation tube is selectable for the Multi G
- Vertical mounting position of the separation kit is allowed
 Max 15° as installation angle in horizontal mounting position
- T-tubes are forbidden because it causes a uneven refrigerant flow
- Minimum distance between two separation tubes is 500mm
- The separation tube is standard equipped with flare connections

Applicable outdoor units

Type AOYG 45 LBT8

Dimensions

UTP-SX248A

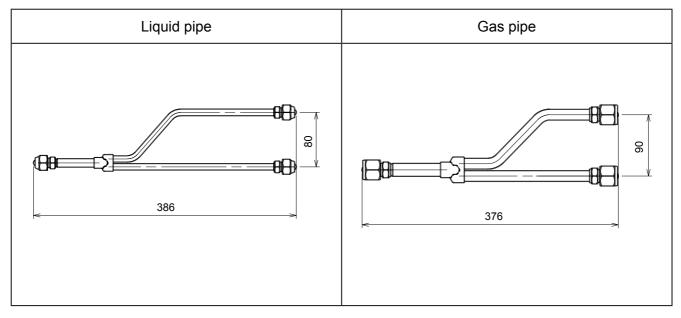

J.02

Air conditioning and heatpumps

UTP-SX248A

Fujitsu Multi-split Accessories Installation equipment Multi-split

