

- Fujitsu
- Mono-split
- Accessories
- Installation equipment



Accessoires - Auto louver grille kit type UTD-GXT

Brand


- Fujitsu - Airstage

Function

- Installation equipment, auto louver grille kit


Applicable indoor units

- Type **ARYG 07/09/12/14 LLTA/B** = type A
- Type **ARXG 07/09/12/14 KLLAP** = type A
- Type **ARYG 18 LLTB** = type B
- Type **ARXG 18 KLLAP** = type B
- Type **ARXD 04/07/09/12/14 GLEH** = type A
- Type **ARXD 18 GLEH** = type B
- Type **ARXD 24 GLEH** = type C
- Type **ARYG 09/12/14 LSLAP** = type A
- Type **ARXG 07/09/12/14 KSLAP** = type A
- Type **ARYG 18 LSLAP** = type B

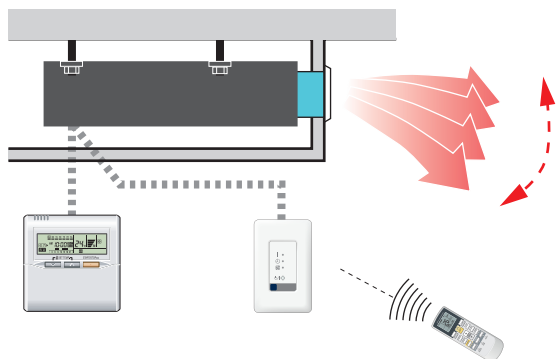

Technical specifications "HEATING PUMP"		Specifications		
Applicable indoor units		UTD-GXSA-W ARYG 07/09/12/14 LLTA ARXD 07/09/12/14 LATH	UTD-GXSB-W ARYG 18 LLTA ARXD 18 LATH	UTD-GXSC-W ARYG 24 LLTA ARXD 24 LATH
Power supply		Connectable to the control box of the indoor unit		
Mounting method		Screw-fastening to flange or rectangular duct		
Limitation of rectangular extension piece		1,0m (Max. duct length between indoor unit and grille)		
Dimension (H x B x D)	mm	180 x 683 x (84+9)	180 x 883 x (84+9)	180 x 1083 x (84+9)
Weight	kg	2	2,50	3
Colour		White		
Operating range in cooling	°C	18 ~ 32 / < 80% R.V.		
Operating range in heating	°C	16 ~ 30		

Dimensions

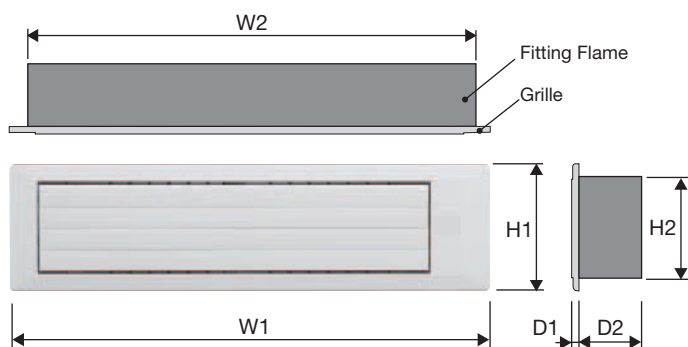

Model	Dimensions					
	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645	180	148	9	84
UTD-GXTB-W	883	845				
UTD-GXTC-W	1083	1045				

(Unit: mm)