

- Fujitsu
- Mono-split
- Cassette type
- Indoor unit
- R410a



Cassette models Fujitsu 3ph type AUYG LRLA

Brand

- Fujitsu

Product

- Indoor unit split type, cassette 84/84

Application

- Cooling or Heating of offices, rooms or shops
- For areas between 100 and 160 m²

Function

- Air-Air Heatpump, inverter type

Refrigerant

- R410A

Features

- Wired remote controller included. Type **UTY-RNNYM**
- IR remote controller in option. Type **UTY-LRHYA1**
- New panorama flow design panel
- Detachable, washable filter and intake grille
- Long-life filter
- Control box easily accessible from bottom side
- Air impulsion system from 3 to 4 channels
- Integrated condensate pump: 850mm discharge (from bottom side of unit)
- Slim height of minimum 288mm in a false ceiling
- Four fan speeds (High/Medium/Low/**QUIET**)
- Colour : RAL 9016 (White)
- Connectable distributing duct (350x100mm)
- Connectable fresh air duct (dia.80mm)
- Moisture removal
- Up/Down swing flaps
- Automatic flaps
- Auto shut flaps
- Automatic air flow adjustment
- Auto restart
- Auto-changeover
- Program timer (IR controller)
- Sleep timer (IR controller)
- Weekly timer (Wired remote controller)
- Setback timer (Wired remote controller)

- EIB-input and outputsignal
- Transparent drainage spigot

Applicable outdoor units

- Type **AOYG 36/45/54 LATT**


Accessories

- Wired remote controller. Type **UTY-RVNYM**
- Luxury wall remote control type **UTY-RVNYM**
- IR remote controller kit. Type **UTY-LRHYA2**
- Fresh air intake kit. Type **UTY-VXGA**
- Big frame panel. Type **UTG-AGYA-W**
- Panel spacer. Type **UTG-BGYA-W**
- Shutter for 3-way system. Type **UTR-YDZC**
- Insulation kit for high humidity. Type **UTZ-KXGA**
- External indication kit. Type **UTY-XWZX**
- External control kit. Type **UTR-ECS5A**

Technische specificaties "WARMTEPOMP"		Specifications			
		AUYG 36 LRLA	AUYG 45 LRLA	AUYG 54 LRLA	
Koelvermogen (min. - nom. - max.)*	kW	4,7 - 10,0 - 11,4	5,0 - 12,5 - 14,0	5,4 - 14,0 - 16,0	
Verwarmingsvermogen (min. - nom. - max.)*	kW	5,0 - 11,2 - 14,0	5,4 - 14,0 - 16,2	5,8 - 16,0 - 18,0	
Verwarmingsvermogen bij -7°C (bu) @ 21°C (bi)	kW	11,80	13,20	14,10	
Koelmiddel		R410A	R410A	R410A	
Ontvochtiging	l/h	3,00	4,50	5,00	
Opgenomen stroom in koeling (nom. - max.**)	A	3,7 - 7,9	5,3 - 8,9	6,5 - 9,9	
Opgenomen stroom in verwarming (nom. - max.**)	A	3,9 - 7,9	5,3 - 8,9	6,6 - 9,9	
Opgenomen vermogen in koeling (nom. - max.)	kW	2,44 - 5,12	3,54 - 5,8	4,36 - 6,48	
Opgenomen vermogen in verwarming (nom. - max.)	kW	2,56 - 5,12	3,58 - 5,8	4,43 - 6,48	
Luchtdebiet (maximum) (K/V)	m³/h	1800/1800	1900/1900	2000/2000	
Luchtdebiet (medium) (K/V)	m³/h	1430/1430	1640/1640	1700/1700	
Luchtdebiet (minimum) (K/V)	m³/h	1250/1250	1460/1460	1530/1530	
Luchtdebiet (Quiet) (K/V)	m³/h	1150/1150	1250/1250	1300/1300	
E.E.R. (koeling)	kW/kW	4,10	3,53	3,21	
C.O.P. (verwarming)	kW/kW	4,38	3,91	3,61	
Energieklasse		A/A	A/A	A/A	
Maximaal geluidsdruk niveau @ 1 m (K/V)	dB	44/44	46/46	47/47	
Gemiddeld geluidsdruk niveau @ 1 m (K/V)	dB	39/39	42/42	43/43	
Minimaal geluidsdruk niveau @ 1 m (K/V)	dB	36/36	40/40	41/41	
Quiet geluidsdruk niveau @ 1 m (K/V)	dB	33/33	36/36	37/37	
Afmetingen inbouwgedeelte (H x B x D)	mm	288x840x840	288x840x840	288x840x840	
Afmetingen sierrooster (B x D)	mm	50x950x950	50x950x950	50x950x950	
Gewicht (incl. sierpaneel)	kg	31,50	31,50	31,50	
Koelleidingen	inch	3/8 - 5/8	3/8 - 5/8	3/8 - 5/8	
Maximum lengte/hoogte koelleiding	m/m	75/30	75/30	75/30	
Afstandsbediening		Wand	Wand	Wand	
Afvoer condensaat (bu/bi)	mm	32/25	32/25	32/25	
Stroomtoevoer		AOYG	AOYG	AOYG	
Kabelsectie tss binnen- & buitengroep	mm²	4G 1,5	4G 1,5	4G 1,5	

* Specificaties en design kan wijzigen zonder bericht voor verdere verbeteringen
 * Koeling/Verwarming capaciteiten zijn gerealiseerd bij de volgende condities.
 (Koeling) Binnen temp.:27°C D.B./19°C N.B. - Buiten temp.:35°C D.B./24°C N.B.
 (Verwarming) Binnen temp.:20°C D.B. - Buiten temp.:7°C D.B./6°C N.B.

Dimensions

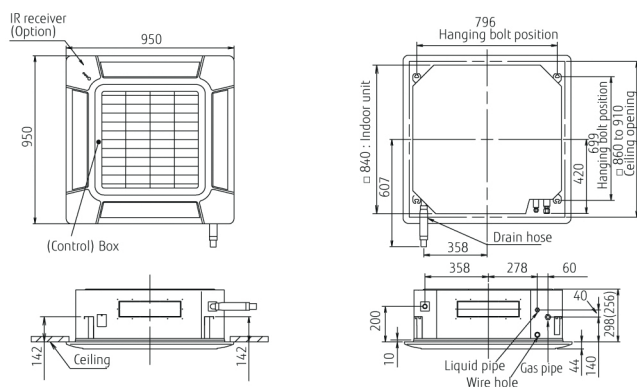

- Fujitsu
- Mono-split
- Accessories
- Decoration panel



Decorationpanel for cassettes 84/84 type UTG-UGYA-W

Brand

- Fujitsu

Product

- Accessory, decoration panel for cassette 84/84

Function

- Installation equipment

Applicable indoor units

- Type **AUYG LRLE**
- Type **AUYG LRLA**
- Type **AUXD GALH**
- Type **AUXA GALH**

Features

- Decoration panel is always needed to finish the installation
- New panorama flow design grille (95 x 95cm)
- Wide opening for easy maintenance
- Detachable, washable filter and intake grille
- Comfortable auto air flow direction and auto swing (4-step)
- Select 3-way or 4-way air flow to suit your needs
- Filter maintenance indication