


**UTY-RSRY /  
UTY-RHRY**

- Fujitsu
- Mono-split
- Accessories
- Controllers

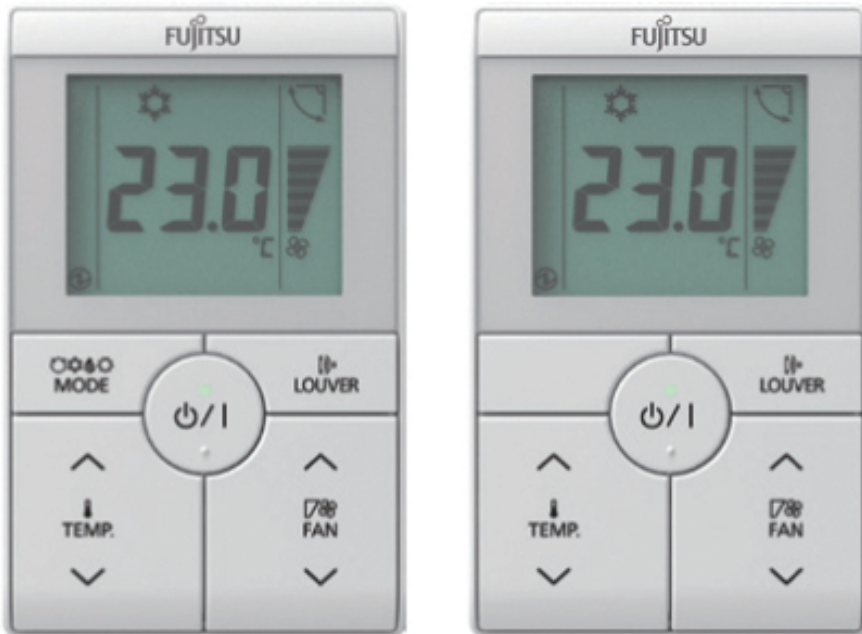

## Accessories - Simple wired controller type UTY-RSRY / UTY-RHRY

### Brand

- Fujitsu - Airstage

### Product

- Single remote controller

### Applicable indoor units

- Type ASYG/ASEH KG + UTY-TWRXZ2
- Type ASYG/ASEG KE + UTY-TWRXZ2
- Type ASYG/ASEH KM + UTY-TWRXZ2
- Type ASYG/ASEG 18/24 KM + UTY-TWRXZ2
- Type ASYH/ASEH 30/36 KM + UTY-TWRXZ2
- Type ASYG LMTA + UTY-TWRX
- Type AGYG/AGEG KVCA + UTY-TWRXZ3
- Type ABYG/ABEG KRTA
- Type AUXG KVLA
- Type AUXG KRLB/LRLB
- Type ARXG KHTAP/ARYG LHTBP
- Type ARXH KMTAP
- Type ARXG KSLAP/ARYG LSLAP
- Type ARXG KLLAP
- Type ARXG KMLA/B
- Type ARXG KHTB
- Type ARYG 72/90 LHTA
- VRF JIIS/JIII/JIIIL/VIII/VRII/JIVS/JIV/JIVL/VRIV

### Features

- Compact remote controller provides access to basic functions
- Up to 16 indoor units can be controlled with one remote controller
- Suitable for hotels which have many visitors coming in and going out and do not require detailed functions.
- **User-friendly operation**
  - Provides access to basic operation, such as Start/Stop, Fan Control and Temperature setting
  - A large Start/Stop button is provided in the centre of the remote controller unit for easy operation.
  - Can be incorporated with the standard remote controller
  - Following an error display, Diagnostics can be carried out on the controller.
- **Simple installation**

- Can be mounted on the European Mounting Box of 60mm or the JIS built-in box of 83,5mm
- **Background light**
  - Backlight enables easy operation in a darkened room
  - Backlight activates during all button operations, and last 10 seconds in operating mode and 5 seconds in stop mode after a button is pressed.

**Dimensions**

- 120 x 75 x 19,4 (H x W x D) [mm]