


- Circular heater
- Electrical

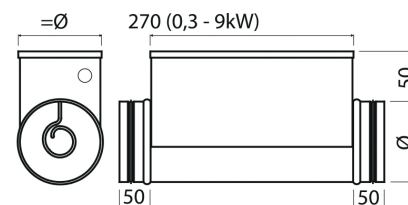

Electrical heating batteries type CVA - MPX

Round electrical heating battery for connection of an external regulating signal 0-10V, maximum blowing temperature: 50°C. A minimum air speed of 1,5m/s is necessary for the battery. Available in diameters from 100 to 400 mm and capacities from 300 to 12000 W. Tension 230 or 400 VAC.

Ø [mm]	Min. Qv [m3/h]	Technical data		
		V/50Hz	P [kW]	In [A]
CVA-MPX 100	40	1-230	0,3/0,6/0,9/1,2	1,4/2,8/4,1/5,5
CVA-MPX 125	70	1-230	0,3/0,6/0,9/1,2/1,5/1,8	1,4/2,8/4,1/5,5/6,8/8,2
		1-230	1,2/2,0/2,4	5,5/9,1/10,9
CVA-MPX 160	110	2-400	3,0/5,0/6,0	7,9/13,2/15,8
		3-400	6	8,70
		1-230	1,2/2,0/2,4	5,5/9,1/10,9
CVA-MPX 200	170	2-400	3,0/5,0/6,0	7,9/13,2/15,8
		3-400	6	8,70
		1-230	1,2/2,0/2,4	5,5/9,1/10,9
CVA-MPX 250	270	2-400	3,0/5,0/6,0	7,9/13,2/15,8
		3-400	6,0/9,0	8,7/13,0
		1-230	1,2/2,0/2,4	5,5/9,1/10,9
CVA-MPX 315	415	2-400	3,0/5,0/6,0	7,9/13,2/15,8
		3-400	6,0/9,0/12,0	8,7/13,0/17,3
		2-400	3,0/5,0/6,0	7,9/13,2/15,8
CVA-MPX 400	690	3-400	6,0/9,0/12,0	8,7/13,0/17,3