

## Nylon straps type NCA

Nylon clamps

### Brand

Sufix

### Application

- To fix and connect flexible ducts
- Allround fixing purposes
- Only to be used indoor

### Material

- Made of high strength nylon
- Flame class UL-94V-2, self-extinguishing, fungus inert
- Working temperature from -15 to 85°C

### Color


- White

### Models

- Length according to the diameter, range from 46 up to 380 mm

### Accessories

- To use with **TNK1** for tighten and cut off nylon clamps.

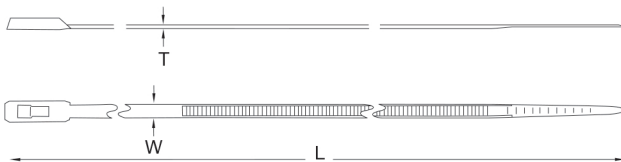

	Dimensions		
	L [mm]	T [mm]	W [mm]
NCA 0-46	160	1.6	4.7
NCA 0-55	200	1.6	4.7
NCA 0-89	310	1.6	4.7
NCA 0-100	432	1.8	4.8
NCA 0-125	450	2	8
NCA 0-185	610	2	9
NCA 0-246	812	2	9
NCA 0-270	914	2	9
NCA 0-380	1219	2	9



Minimum Tensile strength values			
Type	[N] 21°C	[N] +80°C	[N] -40°C
NCA 0-100	220	165	165
NCA 0-125	530	413	413
NCA 0-185	800	600	600
NCA 0-246	800	600	600
NCA 0-270	800	600	600
NCA 0-380	800	600	600
NCA 0-46	220	165	165
NCA 0-55	220	165	165
NCA 0-89	220	165	165
NCA-BL 0-46	220	165	165
NCA-BL 0-55	220	165	165
NCA-BL 0-89	220	165	165